

IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

When using electrical equipment, basic safety precautions should always be followed including the following:

- **DISCONNECT AC POWER SUPPLY BEFORE SERVICING.**
- Installation and servicing of this equipment should be performed by qualified service personnel only.
- Ensure the electricity connections conform to the National Electrical Code and local regulations if applicable.
- Do not mount near gas or electric heaters.
- Equipment should be mounted in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Any modification or use of non-original components will void the warranty and product liability.
- Do not use this equipment for other than intended use.




SAVE THESE INSTRUCTIONS!

Installation using a Wall Mounted J-box

1. Remove mounting plate from luminaire. Begin by loosening the mounting plate set screws at the bottom of the luminaire housing (Fig. 1).

2. After loosening the mounting plate set screws, remove the mounting plate from the back of the luminaire housing (Fig. 2).

3. Position the mounting plate over the existing J-box and attach the mounting plate to the J-box. If the mounting plate holes are not aligned with the J-box holes, drill additional holes in the mounting plate (Fig. 3).

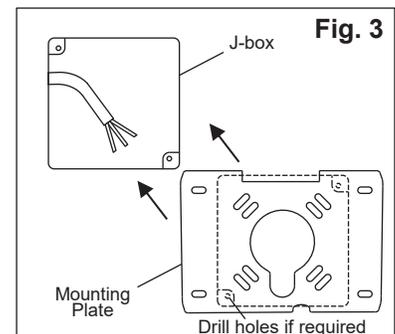
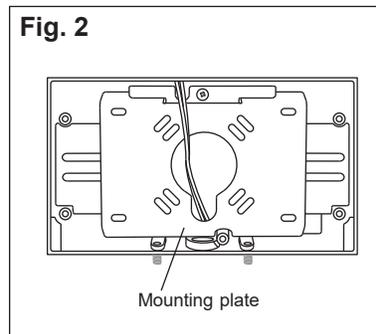
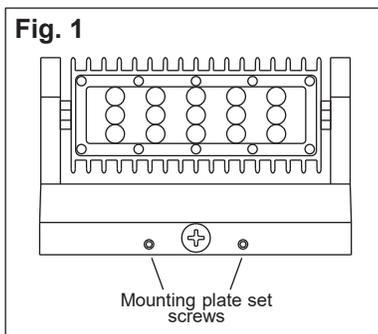


IMPORTANT: Weatherproof your outdoor installation, be sure to seal all holes in the fixture's housing such as the mounting, conduit, plugs, sensors, photocontrols, etc. with silicone sealant.

4. To achieve a watertight seal, attach the luminaire gasket to the back of the mounting plate. (Fig. 4).

5. After attaching the mounting plate to the J-box, pull the incoming power wires through the hole in the mounting plate (Fig. 5).



6. Connect the incoming supply wires to the luminaire power wires and then push them inside the J-box. Refer to the **Wiring Diagram**. (Fig. 6)

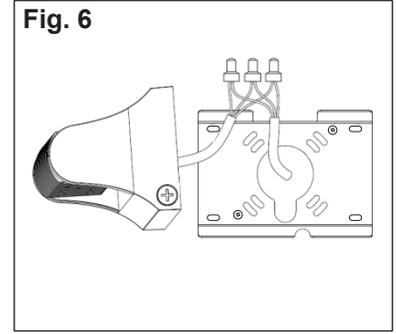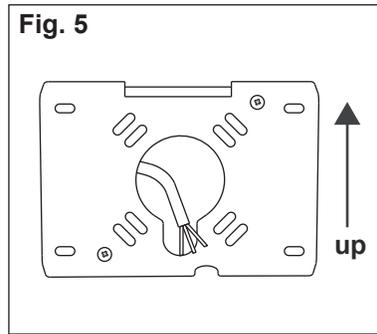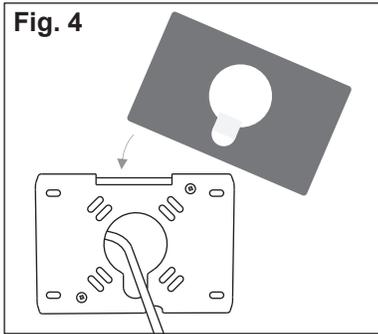

7. Mount the luminaire housing on the top slots of the mounting plate, and then retighten the mounting plate set screws (Fig. 7).


8. Rotate the LED module to the desired position, and then tighten the LED module set screws (Fig. 8).

Warning: Forcing the rotation of the LED module in any direction over 360° from the directional stopping point could damage the internal stop and wire harnesses.

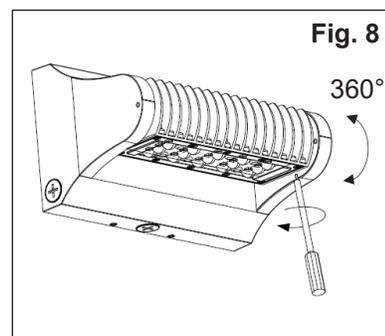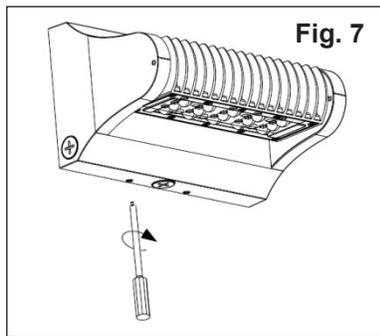

IMPORTANT: Weatherproof your outdoor installation, be sure to seal all holes in the fixture's housing such as the mounting, conduit, plugs, sensors, photocontrols, etc. with silicone sealant.

Wiring Diagram

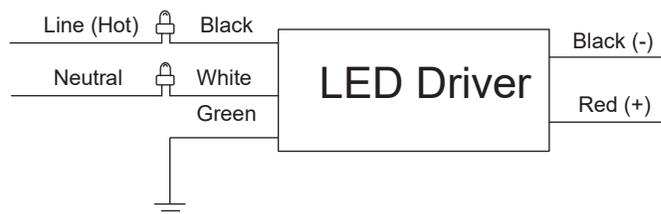

Note: To meet the requirements of DLC certification, the LED modules must be positioned in the same direction. Luminaires installed with LED modules positioned in different directions will not meet DLC requirements.

