

**DESCRIPTION**

4" Recessed downlight retrofit trim with integrated LED power supply and thermal management system. Designed to fit most standard 4" recessed housings.

**SPECIFICATIONS**

**Construction:**

- Heat sink and aluminum PCB optimize thermal management
- Durable thermoplastic construction
- E26 medium screw-base Edison connector provides easy retrofit of incandescent housings
- 4" square baffle snap-in (accessory)

**Optics/ LEDs:**

- Long life LEDs with up to 50,000 hours at 70% lumen maintenance
- Choice of 2700K (±145), 3000K (±175), 4000K (±275) or 5000K (±283) color temperature with 80 CRI
- Produces 550-730 lumens output from luminaire
- Uses high power, high quality Cree LEDs

**Electrical:**

- LED driver dimmable down to 10% with most dimmers
- Save 75% compared to incandescent sources
- 120V, 50/60Hz
- Includes socket adapter
- 8w power consumption
- Operation temperature of -20°C-40°C (-4°F-104°F)

**Installation:**

- Compatible with most 4" recessed cans
- Compatible with insulated, non-insulated and air-tight ceilings
- Easy installation with integral clips
- No tools required for installation

**Testing & Compliance:**

- Tested in accordance with IESNA LM79 & LM80
- ETL Listed for Wet Locations US and Canada
- Energy Star qualified
- Passes FCC Class B
- Meets state of California Title 24 requirements

**Warranty:**


- 5 year warranty (terms and conditions apply)

**Note:** Environment and application will affect actual performance. Typical values and 25°C used for testing. Specifications subject to change without notice.


Model: \_\_\_\_\_ Date: \_\_\_\_\_  
 Accessories: \_\_\_\_\_  
 Job Name: \_\_\_\_\_ Type: \_\_\_\_\_



**Dimensions**

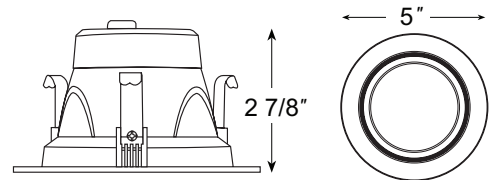

**Trim Accessory**

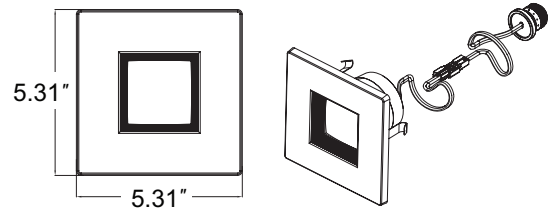

**Ordering Information** (Example: BRK-LED4GR-27K-ECO)

Series	Color	CCT	Accessory
BRK-LED4	BW = White Baffle	27K-ECO = 2700K	LED4-TRMPLT-ECO-SQ = Square Trim (snap-on)
		3K-ECO = 3000K	
		4K-ECO = 4000K	
		5K-ECO = 5000K	