

DESCRIPTION

5"-6" Recessed downlight retrofit trim with integrated LED power supply and thermal management system designed to fit most standard 5" & 6" recessed housings.

SPECIFICATIONS

Construction:

- Durable thermoplastic construction
- E26 Medium screw-base Edison connector provides easy retrofit of incandescent housings
- 6" Square baffle snap-in (accessory)

Optics/ LEDs:

- Long-life LEDs with up to 50,000 hours at 70% lumen maintenance
- Choice of 2700K (±145), 3000K (±175), 3500K (±225), 4000K (±275) or 5000K (±283) color temperature with 80 CRI
- Produces 900-1060 lumens
- Uses high-power, high-quality LEDs

Electrical:

- LED driver dimmable down to 10% with most dimmers
- Save 75% compared to incandescent sources
- Power factor ≥ 0.90
- 120V, 50/60Hz
- 12 Watts power consumption
- Operation temperature: -20°C to 40°C (-4°F to 104°F)

Installation:

- Compatible with most 5" and 6" housings
- Compatible with non-insulated and airtight ceiling
- Easy installation with adjustable torsion spring
- Torsion spring is designed to fit into 5" or 6" housing automatically without changing mounting tab
- No tools required for installation

Testing & Compliance:

- Tested in accordance with IESNA LM79 & LM80
- ETL Listed for Damp Locations
- Energy Star qualified
- Passes FCC Class B
- Meets state of California Title 24 requirements

Warranty:


- Five year warranty (terms and conditions apply)

Note: Environment and application will affect actual performance. Typical values and 25°C used for testing. Specifications subject to change without notice.


Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____



Dimensions

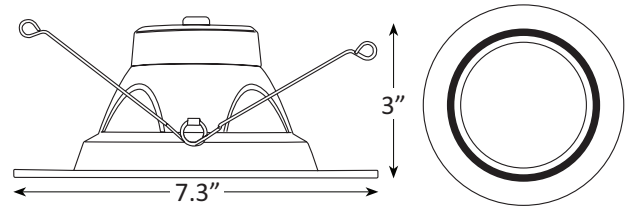

Baffle Accessory

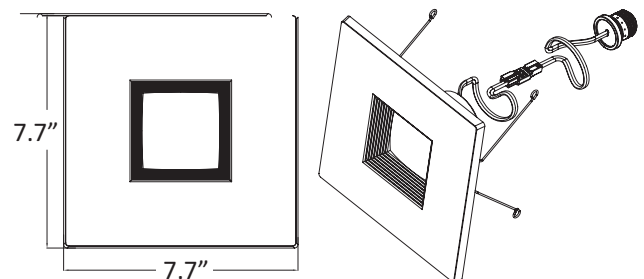

Ordering Information (Example: BRK-LED56-BW-27K-ECO)

Series	Color	CCT	Accessory
BRK-LED56	BW = White Baffle	27K-ECO = 2700K	LED56-TRMPLT-ECO-SQ = Square Baffle (snap-on)
		3K-ECO = 3000K	
		35K-ECO = 3500K	
		4K-ECO = 4000K	
		5K-ECO = 5000K	