

DESCRIPTION

The Trace-lite TL110-CF Series is an architectural, full cutoff wallpack that is ideal for parking areas, entrances, walkways, underpasses, loading docks, and recreation areas.

SPECIFICATIONS

Construction:

The Trace-lite TL110-CF Series features a durable, die-cast aluminum enclosure with an architectural bronze powder coated finish. Enclosure is fully sealed and gasketed, and is Wet Location Listed for outdoor use. Enclosure and hardware are corrosion resistant. The TL110-CF features an internal, anodized aluminum reflector which provides ideal light distribution, and the lamp(s) are protected by a high-impact, heat resistant tempered glass lens.

Lamps & Ballasts

Compact Fluorescent: 4-Pin Triple Tube lamps from 26 to 42 watts in a single or double lamp configuration, utilizing a GX24-q3 base with an electronic programmed start ballast rated for a minimum operating temperature of -20°C (-4°F).

Installation:

The Trace-lite TL110-CF Series is ideal for mounting to any vertical surface and features a hinged design for easy access to internal components. Can be wired to a 4" junction box, or surface mounted using 1/2" NPS conduit entry points. Can be mounted in Up-light configuration in Damp Locations ONLY.

Battery Back-up (Option: BB):

TRACE*LITE's battery back-up option for compact fluorescent (CF) luminaires provides up to 750 lumens in the event of a primary power failure. The emergency back-up option includes a battery pack along with a charging/transfer device that keeps the battery pack charged during normal AC operation and transfers battery power to the compact fluorescent lamp when the device senses that the primary AC power has failed. Minimum operating temperature for this option is 32°F (0°C).

Photocontrol (Accessory: PC):

Optional field-installed photocontrol provides dusk-till-dawn security. Input voltage must be specified to match fixture input voltage.

Listing:

The TL110-CF is suitable for wet locations.

Warranty:

Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts are warrantied for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty.

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____




ORDERING INFORMATION

Example: TL110-CF-42-120/277


Series	Lamp Type	Lamp Wattage	Input Voltage	Options (Factory Installed)
TL110	CF = Compact Fluorescent	32 = 32 Watts	120/277 = 120/277VAC	BB = Battery Backup
		42 = 42 Watts		2B = Two (2) AC Ballasts for Two (2) Lamp Fixtures
		52 = 2 x 26 Watts		
		64 = 2 x 32 Watts		
		84 = 2 x 42 Watts		
				Accessories¹ (Field Installed)
				PC1 = 120VAC Photocontrol
				PC2 = 208-277VAC Photocontrol
				WG110 = Wireguard
				RL110 = Replacement Lens
Notes				
¹ Order as separate line item				

SAMPLE PHOTOMETRICS

TL110-CF-42 Mounted at 10'

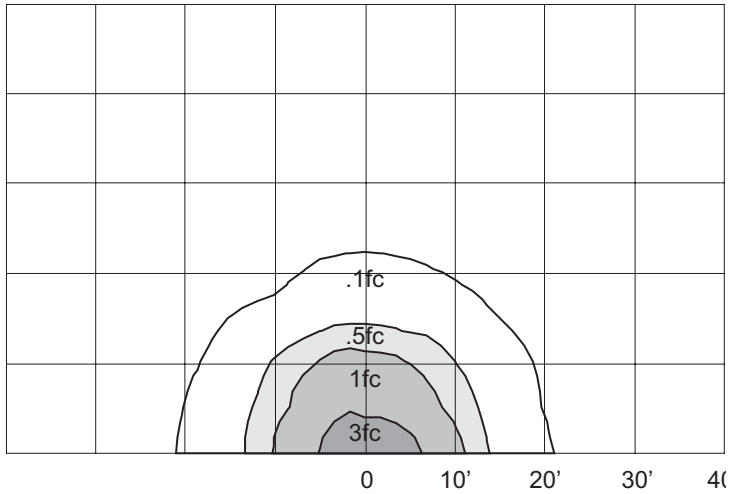

DIMENSIONS

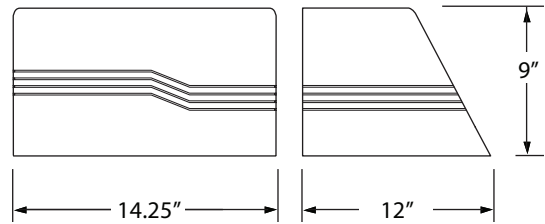

TL110 Approx. Weight: 12 lbs.