

DESCRIPTION

The Trace-lite TL112-CF Series is an architectural, full cutoff wallpack that is ideal for parking areas, entrances, walkways, underpasses, loading docks, and recreation areas.

SPECIFICATIONS

Construction:

The Trace-lite TL112-CF Series features a durable, die-cast aluminum enclosure with an architectural bronze powder coated finish. Enclosure is fully sealed and gasketed, and is suitable for wet locations. Enclosure and hardware are corrosion resistant. The TL112-CF features an internal, anodized aluminum reflector which provides ideal light distribution. The lamp(s) are protected by a high-impact, heat resistant tempered glass lens.

Lamps & Ballasts

Compact Fluorescent: 4-Pin Triple Tube lamps from 26 to 32 watts in a double lamp configuration, utilizing a GX24-q3 base with an electronic programmed start ballast rated for a minimum operating temperature of -20°C (-4°F).

Installation:

The Trace-lite TL112-CF Series is ideal for mounting to any vertical surface and features a hinged design for easy access to internal components. Can be wired to a 4" junction box, or surface mounted using 1/2" NPS conduit entry points.

Listing:

The TL112-CF is suitable for wet locations.

Warranty:


Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts are warranted for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty.

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____




SAMPLE PHOTOMETRICS

TL112-CF-42 Mounted at 10'

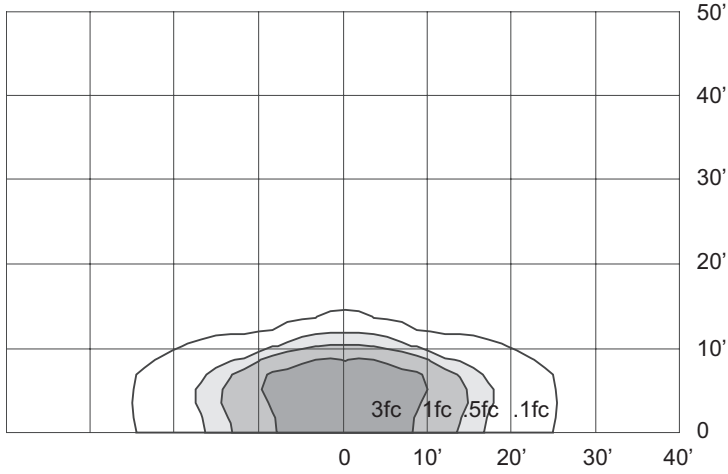

DIMENSIONS

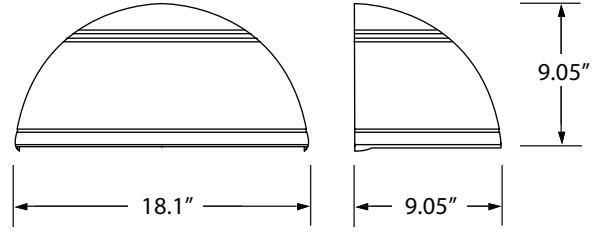

Approximate Weight: 14 lbs.

ORDERING INFORMATION

Example: TL112-CF-52-120/277

Series	Lamp Type	Lamp Wattage	Input Voltage
TL112	CF = Compact Fluorescent	52' = 2 x 26 Watts	120/277 = 120/277VAC
		64' = 2 x 32 Watts	

Notes

¹ Not available with FT option