

DESCRIPTION

The Trace-lite TL401-CF Series is ideal for parking areas, entrances, walkways, underpasses, loading docks, and recreation areas.

SPECIFICATIONS

Construction:

The Trace-lite TL401-CF Series features a durable, corrosion-resistant, die-cast aluminum enclosure with an architectural bronze powder coated finish. Enclosure is fully sealed and gasketed, and is suitable for wet locations and includes corrosion-resistant hardware. The TL401-CF features an internal, anodized aluminum reflector which provides ideal light distribution, and the lamp(s) are protected by a vandal-resistant, UV stabilized polycarbonate prismatic refractor.

Lamps & Ballasts

Compact Fluorescent: 4-Pin Triple Tube lamp 42 watts, utilizing a gX24-q3 base with an electronic programmed start ballast rated for a minimum operating temperature of -20°C (-4°F).

Installation:

The Trace-lite TL401-CF Series can be mounted to any horizontal surface, and is easily wired either to a recessed J-box or by using surface mounted conduits.

Listing:

The TL401-CF is suitable for wet locations.

Warranty:


Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts, Capacitors, and Ignitors are warranted for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty.

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____




SAMPLE PHOTOMETRICS

TL401-CF-42 Mounted at 10'

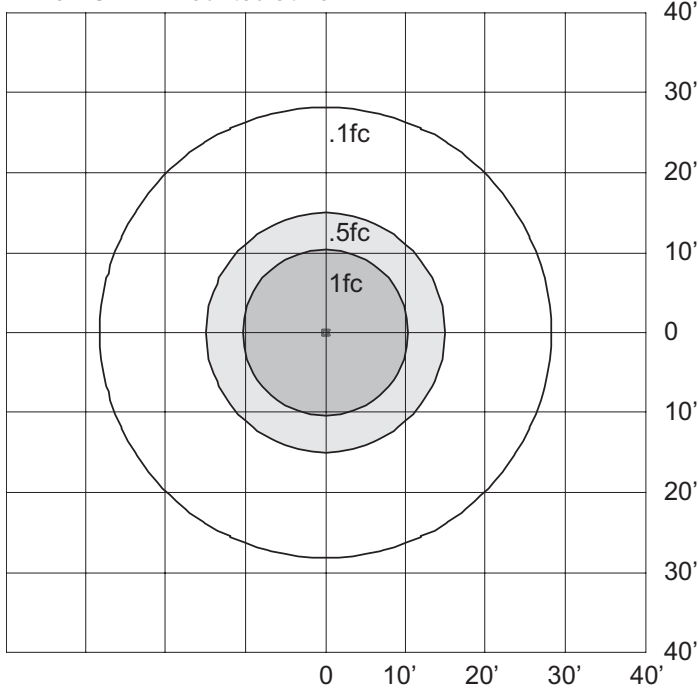

DIMENSIONS

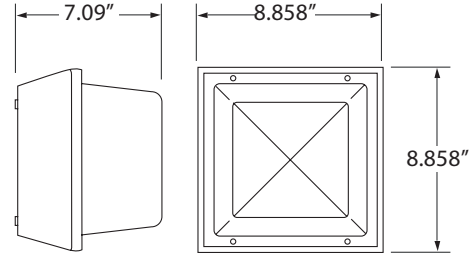

Approximate Weight: 7 lbs.

ORDERING INFORMATION

Example: TL401-CF-42-120/277

Series	Lamp Type	Lamp Wattage	Input Voltage
TL401	CF = Compact Fluorescent	42 = 42 Watts	120/277 = 120/277VAC

Specifications are subject to change without notice.
 Installation must be performed in accordance with
 Barron Lighting Group installation instructions.