

Model Number:

Approvals:

Accessories:

Job:

Type:

**DESCRIPTION**

The Trace-lite TL402-CF Series is ideal for parking areas, entrances, walkways, underpasses, loading docks, recreation areas, or anywhere extra security is required.

**SPECIFICATIONS****Construction:**

The Trace-lite TL402-CF Series features a durable, corrosion-resistant, die-cast aluminum enclosure with an architectural bronze or white powder coated finish. Enclosure is fully sealed and gasketed, and is Wet Location Listed for outdoor use and includes corrosion-resistant hardware. The TL402-CF features an internal, anodized aluminum reflector which provides ideal light distribution, and the lamp(s) are protected by a vandal-resistant, UV stabilized polycarbonate prismatic refractor.

**Lamps & Ballasts**

Compact Fluorescent: 4-Pin Triple Tube lamps from 26 to 84 watts, utilizing a gX24-q3 base with an electronic programmed start ballast rated for a minimum operating temperature of -20°C (-4°F).

**Installation:**

The Trace-lite TL402-CF Series can be mounted to any horizontal surface, and is easily wired either to a recessed J-box or by using surface mounted conduits.

**ARRA - Buy America (Option: USA):**

Fixture series may be built to comply with the American Recovery and Reinvestment Act of 2009 (ARRA) requirements and Buy American provisions - call factory for details.

**Photocontrol (Accessory: PC):**

Optional field-installed photocontrol provides dusk-till-dawn security. Input voltage must be specified to match fixture input voltage.

**Listing:**

The TL402-CF is UL listed for wet locations.

**Warranty:**


Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts, Capacitors, and Ignitors are warrantied for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty.




SPECIFICATIONS ARE SUBJECT  
TO CHANGE WITHOUT NOTICE

**SAMPLE PHOTOMETRICS**

TL402-CF-42 Mounted at 10'

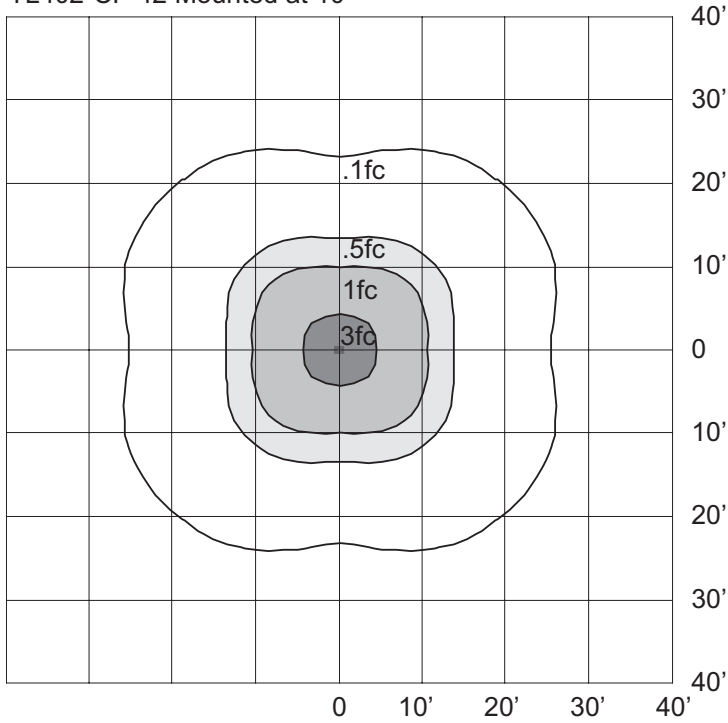

**DIMENSIONS**

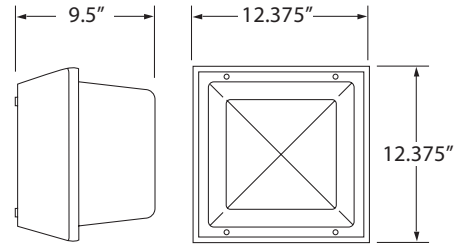

Approximate Weight: 18 lbs.

**ORDERING INFORMATION**

Example: TL402-CF-42-120/277-SZ277-USA

Series	Lamp Type	Lamp Wattage	Input Voltage	Options (Factory Installed)
TL402	CF = Compact Fluorescent	26 = 26 Watts	120/277 = 120/277VAC	SZXXX <sup>1</sup> = Single Line Side Fuse (120 or 277VAC)
		32 = 32 Watts		USA = Meets Buy America Requirements
		42 = 42 Watts		
		52 = 2 x 26 Watts		<b>Accessories<sup>2</sup> (Field Installed)</b>
		64 = 2 x 32 Watts		PC1 = 120VAC Photocontrol
		84 = 2 x 42 Watts		PC2 = 208-277VAC Photocontrol
				SWPR = Swivel Pendant Mount (Round)
				SWPS = Swivel Pendant Mount (Square)
				QMPA = Quick Mount Pendant Adapter
				RL402 = Replacement Lens
				RL402D = Deep Lens (11.5" Fixture Depth)
<b>Notes</b>				
<sup>1</sup> Specify voltage				
<sup>2</sup> Order as separate line item				

