

DESCRIPTION

The Trace-lite TL406-CF Series is ideal for parking areas, entrances, walkways, underpasses, loading docks, and recreation areas.

SPECIFICATIONS

Construction:

The Trace-lite TL406-CF Series features a durable, corrosion-resistant, die-cast aluminum enclosure with an architectural bronze powder coated finish. Enclosure is fully sealed and gasketed, and is Wet Location Listed for outdoor use and includes corrosion-resistant hardware. The TL406-CF features an internal, anodized aluminum reflector which provides ideal light distribution, and the lamp(s) are protected by a vandal-resistant, polycarbonate prismatic refractor.

Lamps & Ballasts

Compact Fluorescent: 4-Pin Triple Tube lamps from 26 to 42 watts in a single or double lamp configuration, utilizing a GX24-q3 base with an electronic programmed start ballast rated for a minimum operating temperature of -20°C (-4°F).

Installation:

The Trace-lite TL406-CF Series can be mounted to any vertical surface, and is easily wired either to a recessed J-box or by using surface mounted conduit. Optional pendant mounting is also available.

ARRA - Buy America (Option: USA):

Fixture series may be built to comply with the American Recovery and Reinvestment Act of 2009 (ARRA) requirements and Buy American provisions - call factory for details.

Battery Back-up (Option: BB):

TRACE*LITE's battery back-up option for compact fluorescent (CF) luminaires provides up to 750 lumens in the event of a primary power failure. The emergency back-up option includes a battery pack along with a charging/transfer device that keeps the battery pack charged during normal AC operation and transfers battery power to the compact fluorescent lamp when the device senses that the primary AC power has failed. Minimum operating temperature for this option is 32°F (0°C).

Photocontrol (Accessory: PC):

Optional field-installed photocontrol provides dusk-till-dawn security. Input voltage must be specified to match fixture input voltage.

Listing:

The TL406-CF is CSA listed for wet locations.

Warranty:


Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts, Capacitors, and Igniters are warranted for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty.

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____




SAMPLE PHOTOMETRICS

TL406-CF-42 Mounted at 10'

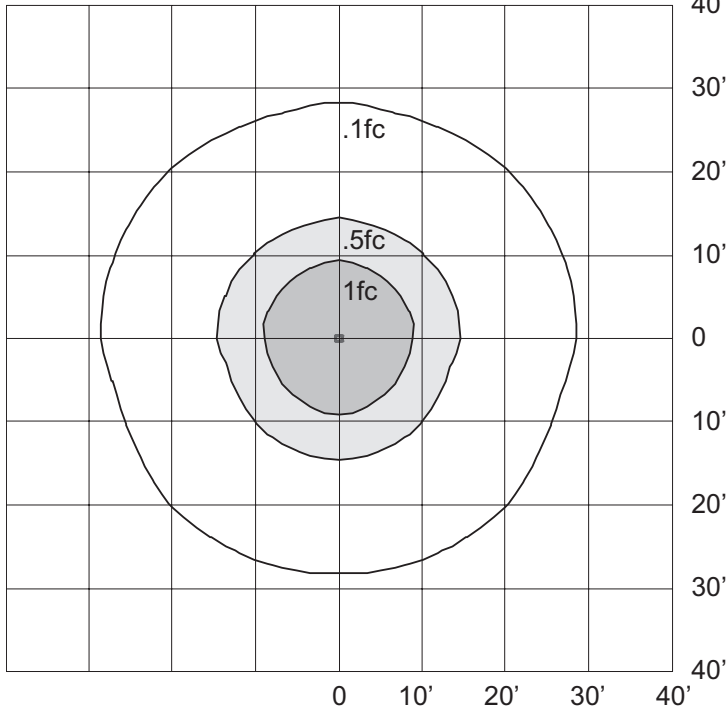

DIMENSIONS

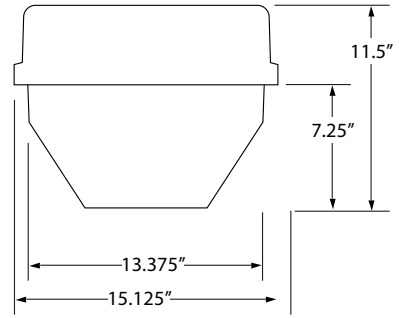

Approximate Weight: 15 lbs.

ORDERING INFORMATION

Example: TL406-CF-42-120/277

Series	Lamp Type	Lamp Wattage	Input Voltage	Options (Factory Installed)
TL406	CF = Compact Fluorescent	26 = 26 Watts	120/277 = 120/277VAC	BB ¹ = Battery Backup
		32 = 32 Watts		USA = Meets Buy America Requirements
		42 = 42 Watts		
		52 = 2 x 26 Watts		
		64 = 2 x 32 Watts		Accessories² (Field Installed)
		84 = 2 x 42 Watts		PC1 = 120VAC Photocontrol
				PC2 = 208-277VAC Photocontrol
				PMJB = Offset Pendant Mount J-Box
				TL406-QM = Quick Mount Pendant Adapter
				SWPR = Swivel Pendant Mount (Round)
				SWPS = Swivel Pendant Mount (Square)
				RL406 = Replacement Lens

Notes

¹ This option is not CSA Listed

² Order as separate line item