

DESCRIPTION

The TRACE*LITE TL528A Series is a high efficiency T5HO fixture engineered for premium performance in low bay and high bay applications and incorporates the highest quality materials and workmanship. TL528A fixtures are an ideal replacement for HID high bays and use half of the wattage. Chain mounting included standard, or it can also be cable mounted with the available cable mount accessory. Field installed wire guard and occupancy sensor accessories are also available.

SPECIFICATIONS

Construction:

TL528A housing is die-formed, cold rolled steel with a powder coated finish. Air vents surround the ballasts and lamps in the back of the fixture to maximize ballast and lamp performance, reliability, and life. A wiring access plate in the back and a UL 2459/CSA182.3 power connector makes the wiring fast and hassle-free. Electronic ballasts are mounted to two (2) access doors in the back of the fixture allowing for easy service and replacement when needed.

Electrical:

The TL528A units with T5HO lamps use programmed start electronic ballasts. Ballasts are UL Listed with 120/277VAC inputs, THD <10%, 0.99 and an "A" sound rating. Ballasts are thermally protected and have automatic reset, eliminating lamp flicker and providing instant on and instant re-strike while maintaining lamp lumen output. The ballasts have end of life protection (EOL), are HPF Class P Type 1 Outdoor, and suitable for cold start in temperatures as low as 0°F (-18°C).

Lamps:

The TRACE*LITE TL528A Series is designed to use 54W T5HO lamps (F54T5HO), providing long life and excellent color quality. Lamps are not included standard and must be ordered as a separate line item for field installation.

Installation:

The TL528A can be mounted using the two (2) 36" lengths of chain and two (2) fixture hooks (included standard). Housing can also be mounted using the cable mount accessory.

Warranty:

Any housing component that fails due to manufacturers defect is guaranteed for one year from the time of shipment. Ballasts are warranted per the specific manufacturer. Warranty does not apply to damages caused by improper installation, application, abuse, fire, or acts of God. Lamp is not covered by manufacturer's warranty.


Model: _____ Date: _____
 Accessories: _____
 Job Name: _____ Type: _____



**WHILE SUPPLIES LAST
LAMPS NOT INCLUDED**



Dimensions

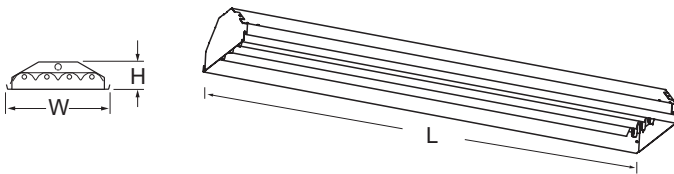

	L	W	H	Weight
T5HO 6 Lamp	46.00"	17.25"	3.625"	12 lb.

Fixture Performance

Part Number	Input Voltage	Ballast	Wattage (Nominal)	Lamps
TL528A-654-U	120~277VAC	Program Start	330	F54W T5HO x 6

Ordering Information

Example: TL528A-654-U

Series	Number of Lamps & Type	Input Voltage	Options (Factory Installed)	Accessories ² (Field Installed)
TL528A	654 ¹ = Six (6) 54W T5HO	U ¹ = 120~277VAC	LC6 = 6' Line Cord 18AWG Blunt Cord	WG528A-6 = Wireguard for 6 Lamp Fixtures CTY10 = 10' Cable Mount with Integral Y-toggles TL-OCCSNS-120/277 = On/Off Occupancy Sensor LC6 = 6' Line Cord 18AWG Blunt Cord
Notes				
¹ Standard ballast configuration on 6 lamp T5HO is three (3) 2-lamp ballasts				
² Order as a separate line item				