

DESCRIPTION

The LE-SMS1 is a Bluetooth® enabled, line voltage wall switch used to manage luminaires. The switch can be linked to one or more luminaires or groups of luminaires via the LiteLogic app. The LE-SMS1 can initiate on and off commands at the touch of a button or by simply walking into the room. It can be used to easily retrofit existing wall switches.

FEATURES & BENEFITS

- Includes LiteLogic wireless Bluetooth® mesh technology
- Easy on/off control
- Built-in analog PIR sensor
- Ideal for retrofit applications, 120-277VAC (neutral wire required)

SPECIFICATIONS

Electrical:

- Input Voltage: 120-277VAC, 60Hz
- Output Voltage: 120-277VAC
- Output Current: 10A Max 720W @120VAC
- Output Power: 800W Max

Bluetooth:

- Transmit Range: 100' max
- Radio Frequency: 2.4GHz ± 75MHz
- Bluetooth Version: 5.0

Sensor Details:

- Analog PIR sensor

Construction:

- Housing: UL 94-V0
- IP Rating: IP20, suitable for indoor use
- Finish: White
- Operating Temperature: 0°C to 55°C (32°F to 131°F)
- Storage Temperature: -30°C to 85°C (-22°F to 185°F)

Testing & Compliance:

- UL Listed LED Controller, complies to UL 8750, RohS
- FCC ID: 2A26YLTKTVT2022
- DesignLights Consortium® (DLC) Qualified Product

Warranty:

- Five year warranty (terms and conditions apply)

Model: _____ Date: _____
 Accessories: _____
 Job Name: _____ Type: _____



Get it from the App Store




Get it from Google Play



ORDERING INFORMATION (Example: LE-SMS1)

Model	Description
LE-SMS1	Bluetooth 120-277VAC Sensor Wall Switch, White Finish, Neutral Wire Required

Wiring Diagram

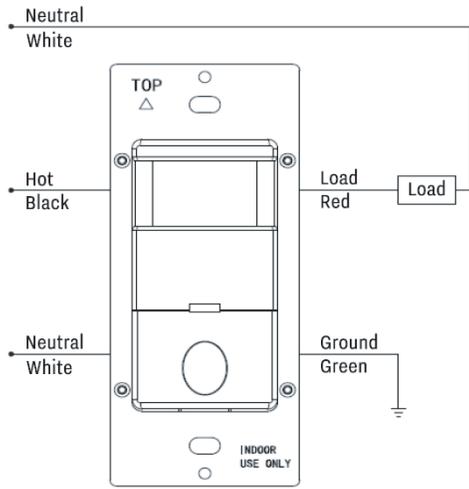

Dimensions

