

ROUND LED GARAGE CANOPY



DLC PREMIUM
40W AND 60W MODELS
**DOMED LENS FOR
UPLIGHT DISTRIBUTION**

BARRON **TRACE**  **LITE**[®]
commercial & industrial lighting

RCL

ROUND LED GARAGE CANOPY


The low-profile Round LED Garage Canopy (RCL) features a domed lens allowing uplight and improved light distribution. Its high-performance light engine is designed for maximum efficacy and heat dissipation. The RCL is offered with an optional integral 1-10V dimming occupancy sensor to maximize energy savings. This product is ideal for applications including, but not limited to, parking garages, schools, office complexes, light commercial developments, apartments, walkways, entryways and stairwells.

Key Features

- 40W and 60W models in 4000K and 5000K CCT
- Optional integral 1-10V dimming occupancy sensor for optimal energy savings
- UL Listed for Wet Locations
- DesignLights Consortium® PREMIUM qualified for maximum utility rebates
- Meets state of California Title 24 for dimming and control of light fixtures



Dimensions

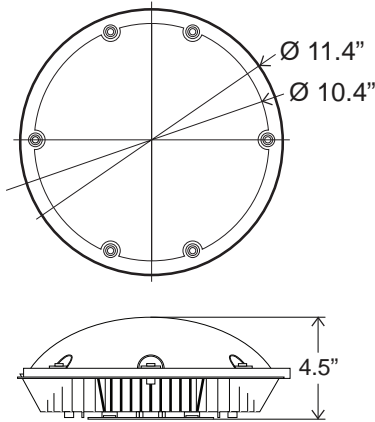

Specs At A Glance*				
Wattage (W)	40		60	
Lumens (lm)	4000K	5000K	4000K	5000K
Lumens (lm)	5244	5569	7432	7818
Efficacy (LPW)	127	132	127	133
Equivalency (HID)	150W		250W	
Distribution	Type V, 160°			
CRI	≥80			
Input Voltage	120-277VAC, 50/60Hz			
Operating Temp.	-20°C to 40°C (-4°F to 104°F)			
Certifications	UL Listed for Wet Locations, DLC PREMIUM			
Warranty	5 Years			
Weight	6.0 lbs			

*Nominal Wattage

Ordering Information (Example: RCL40-4K-WH-SC)

Series/Wattage	CCT	Finish	Options
RCL40 = 40W	4K = 4000K	WH = White	SC = Integral sensor
RCL60 = 60W	5K = 5000K		

Please visit barronltg.com for the latest information.