

CRL Series

Specification Grade LED Emergency Lighting Unit
for Recessed T-Bar Ceilings



Long Life LED
Up to 60ft Spacing
Tool-less Battery Access
Numeric Fault Indicator



5/5
WARRANTY

BARRON EXITRONIX
emergency lighting

CRL Series

Specification Grade LED Emergency Lighting Unit
for Recessed T-Bar Ceilings



The steel CRL Series combines performance, dependability and easy maintenance into a specification grade steel enclosure for recessed T-bar ceiling applications.

Standard Features

- Standard tool-less front battery accessibility for ease of maintenance
- Isolated battery compartment for safe installation and maintenance
- Patent-pending Numeric Indicator option for error-proof visual display of fault detection/ status
- Fully adjustable 3.6w LED lamps deliver industry-leading spacing up to 60'
- Wide Lens optic option optimizes min-to-max ratio for low mounting height applications
- Enclosure constructed of rugged 20 gauge steel
- White finish blends seamlessly for clean, architectural appearance in a grid ceiling
- Conduit entry for flexibility in wiring
- Maintenance-free 6V NiMH battery
- Brownout, low voltage, overload and short circuit protection standard
- 90 minute emergency run time, 24 hour recharge time
- Optional Guardian Self-Test/ Self-Diagnostics (G2)
- 120/277VAC dual primary, 50/60Hz input
- Assembled in the U.S.A.
- 5 year fixture/ 5 year pro-rated battery warranty



Tool-less hinged door for easy and safe access to isolated low voltage battery compartment.




Optional Numeric Indicator (G2-NI) for dependable visual status and fault detection.

Available Options

- Guardian Self-Test/ Self-Diagnostics (G2)
- Numeric Indicator (G2-NI) for dependable visual status and fault identification
- Wide Lens (WL) with 58° viewing angle

Dimensions

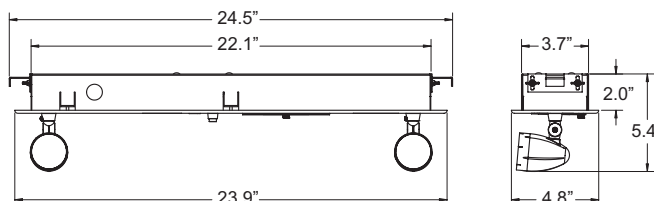

Ordering Information

Example: CRL-8-REN3M-2-G2-N1

Series	Wattage	Lamp Heads	# of Lamps	Options (Factory Installed)
CRL = 6 Volt NiMH	8 = 8 Watt	REN1 = PAR18 Renegade 3.6W LED	2 = 2 Lamps	G2 = Self-Test/Self-Diagnostics with LED Indicator
		REN3M ¹ = PAR16 Renegade MAX 3.6W LED		G2-NI = Self-Test/Self-Diagnostics with Numeric Indicator
				WL = Wide Lens, 58° Viewing Angle

Notes

¹ REN3M lamp heads only available with G2-NI option

² Order as separate line item

Accessories² (Field Installed)

WG-7 = Wire Guard (Back Mount)

XG-EL90 = Poly Guard (Back Mount)

Please visit our website for the latest information.

10840162 07/16



BARRON
lighting group
800.533.3948 • www.barrontg.com