

LED EMERGENCY UNIT



LED economy in a contemporary design.

Efficient and ultrabright white LEDs.

1.5 WATTS

PER LAMP HEAD



EXITRONIX
emergency lighting

barrontg.com

LED-95

Thermoplastic LED Emergency Lighting Unit

The LED-95 Series combines a stylish new look, low-profile, contemporary appearance with LED economy and dependability. Fully adjustable heads complement any application.




Key Features

- LED economy in a contemporary design
- Efficient and ultrabright white LEDs (1.5W per head)
- Fully adjustable heads
- Remote capable (R Option)
- Guardian Self-test/Self-diagnostics available (G2 Option)
- UL 924 Listed
- CEC Listed (<1W power consumption)
- Suitable for Damp Locations



Dimensions

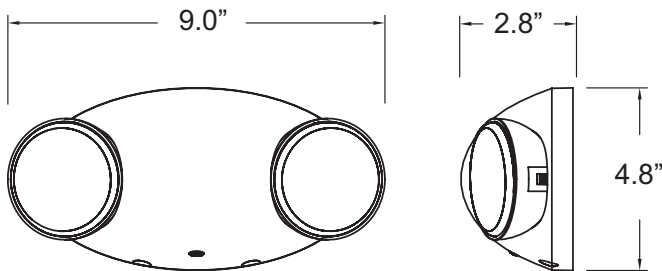

Ordering Information Example: LED-95-WH-G2-R

Series	Finish	Options (Factory Installed)	Accessories ² (Field Installed)
LED-95	BL = Black WH = White	G2 = Self-test/Self-diagnostics R ¹ = Remote Capacity	WPV-2 = Wet Location/Vandal Guard (Back Mount) XG-90 = Poly Guard (Back Mount)

Notes

¹ Compatible for use with single [RL52](#) or up to (2x) [MLED](#) remote lamps only

² Order as separate line item



800.533.3948 | barronltg.com

MKT-LIT-LED-95 10840303 08/18