

ARCHITECTURAL EMERGENCY UNIT



EXITRONIX
emergency lighting

barrontg.com



Compact, flush-mount
architectural design.

New York City approved.

Optional Self-test/Self-diagnostics.

47.5 FOOT

**ON-CENTER
SPACING**

RMW

Architectural Recessed Emergency Lighting Unit

The architectural RMW Series recessed ceiling emergency light will complement any decor with its low-profile unobtrusive design. Combining a rugged steel enclosure with incandescent or long-life LED lamp heads and reliable electronics, this fully recessed emergency unit is ideal for use in restaurants, office buildings and public locations needing a low-profile aesthetic.




Key Features

- Fully recessed low profile steel housing
- LED lamp heads offer 47.5' on-center spacing
- Remote capable
- New York City approved
- 5W LED MR16 or PAR36 sealed beam lamps
- Optional Self-test/Self-diagnostics (G2) available
- Universal recessed ceiling mount



Dimensions

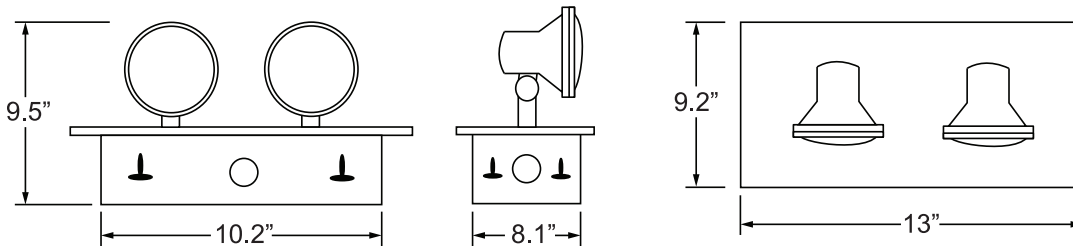

Note: Height will vary based on heads supplied.

Ordering Information Example: RMW6-18-MRL-WH

Series	Wattage	Lamp Heads	Finish	Options (Factory Installed)
RMW6 = 6V	6V Sealed Lead Calcium	HS12 = 12W Halogen Sealed Beam (PAR36)	BL = Black	G2 = Self-test/Self-diagnostics
RMW12 = 12V	18 = 18 Watt	MRL = 5W LED (MR16)	WH = White	
	36 = 36 Watt	TS18 = 18W Tungsten Sealed Beam (PAR36)		Accessories¹ (Field Installed)
	6V NiCad	TW09 = 9W Tungsten Wedge Base (PAR36)		WG-90 = Wire Guard (Back Mount)
	22N = 22 Watt			XG-PS = Poly Guard (Back Mount)
	12V Sealed Lead Calcium			
	36 = 36 Watt			
	12V NiCad			Notes
	42N = 42 Watt			¹ Order as separate line item



800.533.3948 | barrontg.com

MKT-LIT-RMW 108403 09/18