

CHAMPIONEMW

EMERGENCY LIGHTING FOR SPECIAL REQUIREMENTS

- Made in the USA
- Fully adjustable LED or MR16 lamps
- IP66 rating - wet and hose down locations
- Optional internal battery heater for cold locations
- Guardian self-test/self-diagnostics included standard
- Vandal resistant die-cast backplate and polycarbonate lens




CHAMPIONEMW-LED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

LED ORDERING INFORMATION Example: CP-EMW-8-LED-SA-WL

Series	Watts	Lamps	Finish	Options (Factory Installed)
CP-EMW	8 = 8 Watts	LED = 3.6W LED	SA = Satin Aluminum	IH1 = Internal Battery Heater 120VAC
	25 ¹ = 25 Watts		BR = Bronze	IH2 = Internal Battery Heater 277VAC
				WL = Wide Beam 58° LEDs
				TRH = Tamper Resistant Hardware


Notes	Accessories ² (Field Installed)
¹ Provides extended run time of 4 hours	IHB = I-Beam Mounting Bracket
² Order as separate line item	TRHT = Tamper Resistant Tool
	WG-90 = Wire Guard (Back Mount)

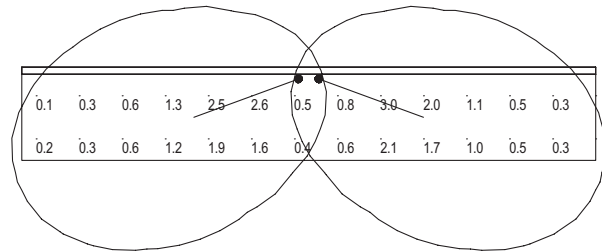

CP-EMW-LED-58
58 Degree LED
40' Spacing
 7.5" Mounting Height
 6' Wide Egress Path

Avg: 1.03
 Max: 2.96
 Min: 0.10
 Avg/Min: 10.30
 Max/Min: 29.60

Room Reflectance
 Ceiling: 80
 Walls: 50
 Floors: 20

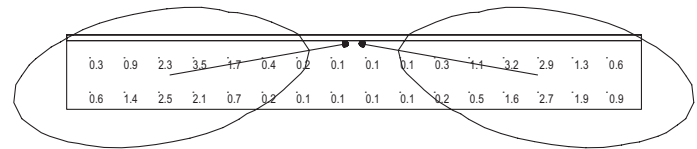

CP-EMW-LED-12
12 Degree LED
50' Spacing
 7.5" Mounting Height
 6' Wide Egress Path

Avg: 1.05
 Max: 5.30
 Min: 0.10
 Avg/Min: 10.50
 Max/Min: 53.00


Room Reflectance
 Ceiling: 80
 Walls: 50
 Floors: 20

CHAMPIONEMW-MR16

MR-16 ORDERING INFORMATION Example: CP-EMW-6-25-12-SA-IH1

Series	Volts (MR16 Only)	Watts (MR16 Only)	Lamps	Finish	Options (Factory Installed)
CP-EMW	6 = 6 Volts	25 = 25 Watts	12 = 12W MR16	SA = Satin Aluminum	IH1 = Internal Battery Heater 120VAC
	12 = 12 Volts	36 = 36 Watts	20 = 20W MR16	BR = Bronze	IH2 = Internal Battery Heater 277VAC
		40 ¹ = 40 Watts	25 = 25W MR16		TRH = Tamper Resistant Hardware
		54 ² = 54 Watts			


Notes	Accessories ³ (Field Installed)
¹ Available in 6 volt only	IHB = I-Beam Mounting Bracket
² Available in 12 volt only	TRHT = Tamper Resistant Tool
³ Order as separate line item	WG-90 = Wire Guard (Back Mount)

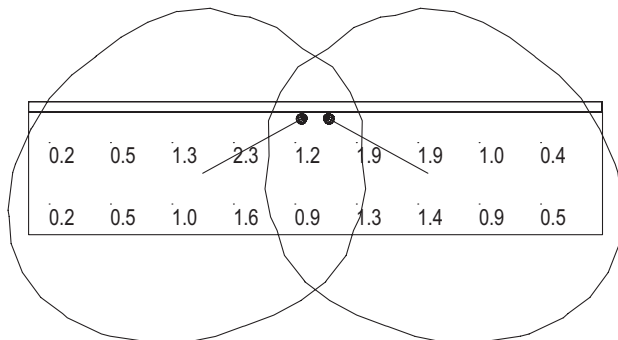

CP-EMW-6-25-12
28' Spacing
 7.5" Mounting Height
 6' Wide Egress Path

Avg: 1.01
 Max: 2.34
 Min: 0.11
 Avg/Min: 9.18
 Max/Min: 21.27

Room Reflectance
 Ceiling: 80
 Walls: 50
 Floors: 20

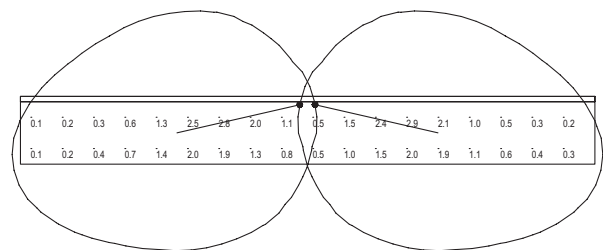

CP-EMW-12-54-25
55' Spacing
 7.5" Mounting Height
 6' Wide Egress Path

Avg: 1.09
 Max: 3.13
 Min: 0.10
 Avg/Min: 10.90
 Max/Min: 31.30

Room Reflectance
 Ceiling: 80
 Walls: 50
 Floors: 20