



WHY JUST BE GREEN WHEN YOU CAN BE COLORFUL?

The LWW is an energy efficient wall wash fixture ideal for back lighting, up lighting and wall wash applications where dramatic lighting effects are desired. This unit uses high power LEDs that are available in warm white, pure white, red and blue. The housing is constructed of aluminum and is completely sealed for outdoor use.

FEATURES

- Available in pure white, warm white, red and blue (supplied in 4' sections)
- Silver powder coat paint
- High power LEDs project light up to 65'
- Standard 5' 120V line cord with plug included
- Rated for indoor and outdoor use
- Controlled by DMX for ON/OFF dimming (programmable by other)
- Pre-installed 3-pin 1' signal cable for end to end connection
- Adjustable tilt design, up to 300° rotation for onsite adjustment
- 3 year warranty

TECHNICAL SPECIFICATION

- 3-pin signal connector
- Standard 120V power cord, single color, linear LED product
- Voltage: 100VAC-240VAC
- Frequency: 60Hz
- Weight: 13.48 lbs
- IP rating: IP65
- Dimensions: 47.25" long, 2.18" wide, 5" high (including mounting feet)
- Operating distance: Up to 30 units can be controlled with one DMX controller
- Meets UL standards

PRODUCT SPECIFICATIONS

- LED specs:
 - 50,000 hour rated life
 - 36 LEDs mounted per 4' section
- Construction:
 - 4' linear product
 - Extruded aluminum housing, clear tempered glass
 - Silver powder coat paint
 - Fully sealed and gasketed unit for outdoor use
 - Each unit has a five (5) foot grounded line cord
 - Integrated driver
- Optic: 25° beam angle, 65' light projection
- Installation: Mounting brackets allow for the user to adjust the angle of the fixture based on project needs and allows for installation on various mounting surfaces
- Operating temperature: -4°F - 104°F (-20°C - 40°C)
- 3 year warranty, does not apply to damages caused by improper installation, abuse, fire or acts of God

Model: _____ Date: _____
 Accessories: _____
 Job Name: _____ Type: _____

LWW

LINEAR LED WALL WASH



APPLICATIONS

- Wall wash
- Flood light
- Bridge up lighting
- Stage/theater lighting
- Building parapet lighting



For the complete line of specialtyLED® products, visit us online at barronltg.com.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

TECHNICAL / PHOTOMETRIC INFORMATION (DATA BASED ON 120V APPLICATION)


Color	Operating Current	Power Consumption	CCT	Lumens (lm/w)
Warm White	0.132A	15.84W	3500K	17.6 lm/w
Pure White	0.132A	15.84W	5000K	17.6 lm/w
Red	0.179A	21.48W	-	
Blue	0.179A	21.48W	-	

ORDERING INFORMATION

Example: LWW-WP-4-120V

Series	Color	Length	Voltage
LWW	WW ¹ = Warm White (3500K) WP ¹ = Pure White (5000K)	4 = 4 Feet	120V = 120V AC
	R = Red B = Blue		Note ¹ Color temperatures can vary ±5%


ACCESSORIES (ORDER AS SEPARATE LINE ITEM)

Part Number	Image	Description
LWW-POWER-10		10' power extension cable

TYPICAL ACCESSORIES FOR LWW SINGLE COLOR INSTALLATION

- LED Linear Wall Wash (LWW-WW-4-120V)
- Optional accessories (LWW-POWER-10)

DIMENSIONS

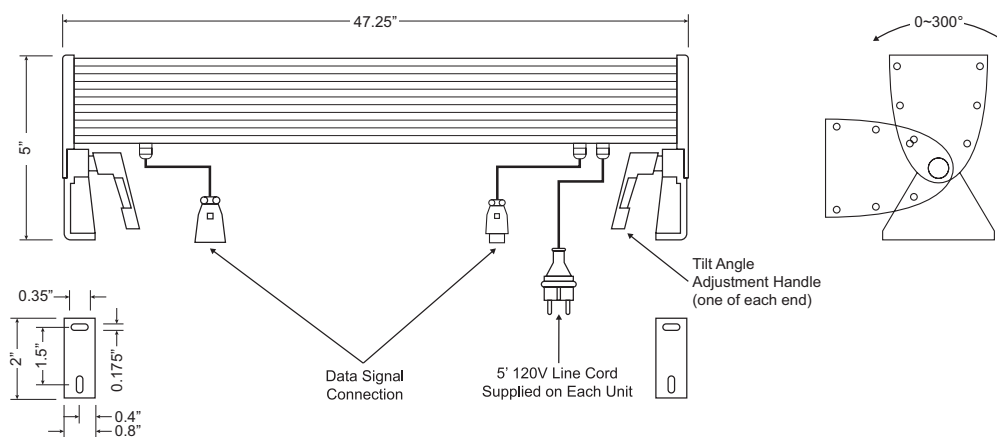

800.533.3948 • www.barronltg.com