

### DESCRIPTION

The AXL2 Series of flood lights efficiently delivers bright, white light with robust performance. Its 100,000 hours rated life significantly decreases maintenance costs over the life of the fixture. The AXL2 is designed to illuminate landscaping, pathways, building facades, long docks and a wide variety of other outdoor areas needing flood lighting. The AXL2 is an ideal choice to maximize energy savings and utility rebates.

### SPECIFICATIONS

#### Construction:

- Die-cast aluminum housing with durable, bronze powder coated finish
- Wireway enclosure is sealed with a watertight, silicone rubber gasket
- Knuckle mount included

#### Optics/LEDs:

- UV-stabilized polycarbonate lens; NEMA Wide 7H x 7V
- Available in 4000K (neutral white)
- 15-50W replace up to 200W HID for over 70% energy savings
- Efficacies up to 118 LPW to maximize energy savings and utility rebates
- L70 > 100,000 hours
- CRI > 80

#### Electrical:

- Class 2 non-dimming power supply, 120-277VAC, 50/60Hz
- Power supply with high power factor of 90% typical
- Total harmonic distortion < 20%

#### Installation:

- Easy installation in new construction or retrofit applications
- Knuckle mount included

#### Testing & Compliance:

- UL Listed for Wet Locations
- Operating temperatures: -20°C to 45°C (-4°F to 113°F)
- Complies with EN61000-4-5 surge immunity (6kVA)

#### Warranty:

- Five year warranty (terms and conditions apply)

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
Accessories: \_\_\_\_\_  
Job Name: \_\_\_\_\_ Type: \_\_\_\_\_

## INVENTORY CLOSEOUT



Knuckle Mount



### Specs at a Glance

Model	AXL2-30
Wattage (W)*	30
Lumens (lm)	3432
Efficacy (LPW)	116
Equivalency (W)	100-150W
CCT (K)	4000K
Distribution	NEMA Wide 7H x 7V
CRI	> 80
Input Voltage	120-277VAC, 50/60Hz
Operating Temp	-20°C to 45°C (-4°F to 113°F)
Certifications	cULus Listed for Wet Locations
Warranty	5 Years
Weight	2.5 lbs

Note: Environment and application will affect actual performance. Typical values and 25°C (77°F) used for testing. Specifications subject to change without notice.

Ordering Information (Example: AXL2-30-4K-K)

Model	Wattage	Color Temperature (CCT)	Mount
AXL2	30 = 30W	4K = 4000K	K = Knuckle Mount


BUG Ratings (Pointing Down)

30W	B2	U0	G0
-----	----	----	----

EPA Values

- 30W
- Front = 0.12 square feet (knuckle); 0.10 square feet (yoke)
  - Side = 0.15 square feet (knuckle); 0.09 square feet (yoke)
  - Face = 0.29 square feet (knuckle); 0.42 square feet (yoke)

Dimensions

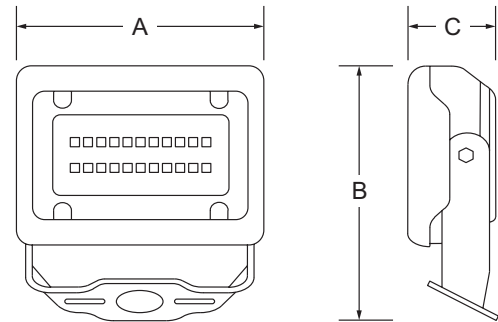

Model	A	B	C	Weight
AXL2-30	7.3"	7.0"	1.5"	2.5 lbs