

**DESCRIPTION**

4" Gimbal trim with integrated LED light engine is designed to fit most standard 4" recessed housings, ideal for remodel or new construction.

**SPECIFICATIONS**

**Construction:**

- Durable thermoplastic construction with a die-cast aluminum trim
- E26 Medium screw-base Edison connector provides easy retrofit of incandescent housings

**Optics/ LEDs:**

- Long-life LEDs with up to 50,000 hours at 70% lumen maintenance
- Choice of 2700K (±145), 3000K (±175) or 4000K (±275) color temperature with 80 CRI
- Produces 675-750 lumens
- Uses high-power, high-quality LEDs

**Electrical:**

- LED driver dimmable down to 10% with most dimmers (Lutron Maestro C-L MACL-153MR, Lutron Skylark C-L SCL-153P, Leviton Sureslide Cat. No.6674, Lutron PD-6WCL, Legrand Harmony HCL453PTCCCV6)
- Saves 75% compared to incandescent sources
- Power factor ≥ 0.90 with input
- 120VAC, 50/60Hz
- 10 Watts power consumption
- Operating temperature: -20°C to 40°C (-4°F to 104°F)

**Installation:**

- Compatible with most 4" housings
- Suitable for non-insulated and airtight ceiling
- Tool-less installation with integral clips

**Testing & Compliance:**

- Tested in accordance with IESNA LM79 & LM80
- cETLus Listed for Damp Locations
- Energy Star Qualified
- Passes FCC Class B
- Meets State of California Title 24 requirements

**Warranty:**


- Five year warranty (terms and conditions apply)

**Note:** Environment and application will affect actual performance. Typical values and 25°C used for testing. Specifications subject to change without notice.

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
Accessories: \_\_\_\_\_  
Job Name: \_\_\_\_\_ Type: \_\_\_\_\_



**Dimensions**

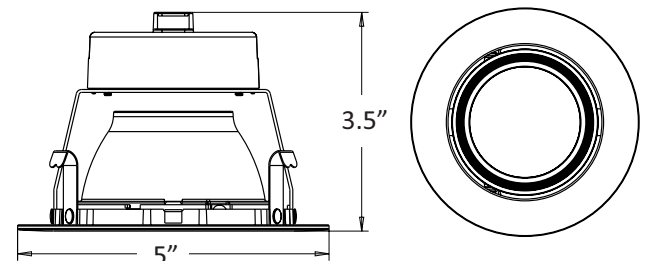

**Ordering Information Example:** BRK-LED4-GR-27K-ECO

SKUs	Description
BRK-LED4-GR-27K-ECO	4" LED Gimbal Trim, 2700K CCT
BRK-LED4-GR-3K-ECO	4" LED Gimbal Trim, 3000K CCT
BRK-LED4-GR-4K-ECO	4" LED Gimbal Trim, 4000K CCT