

**SAVE THESE INSTRUCTIONS!**

**READ CAREFULLY AND FOLLOW ALL INSTRUCTIONS FOR YOUR OWN SAFETY**

- **DISCONNECT AC POWER SUPPLY BEFORE SERVICING.**
- Installation and servicing of this equipment should be performed by qualified service personnel only.
- Ensure the electrical connections conform to the National Electrical Code and local regulations if applicable.
- Do not mount near gas or electrical heaters.
- Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability.
- Do not use this equipment for other than intended use.

The specialtyLED CLBT is made up of Lighting Emitting Diodes (LEDs) consecutively wired within a rigid extruded housing.

**INSTALLATION INSTRUCTIONS**

**SAFETY PRECAUTIONS:**



- It is recommended that you do not cover the product unless done so with extreme caution and attention to ventilation.
- Do not cut, shorten or splice power or data cord.
- Do not route through walls, doors, windows or building structures.
- During installation, do not scratch tampered glass lense as this will affect the optics of the unit.
- Do not open or tamper with sealed unit.
- Do not submerge in liquid or apply near standing water.
- Do not secure power cables with staples, nails or like means that can damage the insulation on the cables.
- Do not mount inside cabinets, tanks or enclosures unless properly ventilated.
- Do not operate in temperatures exceeding 113°F (43°C).
- Ground Fault Circuit Interrupter (GFCI) protection should be provided on all circuits when used for outside applications.
- Do not operate on circuits that do not have proper surge suppression protection. High voltage spikes will damage the LEDs.
- Do not operate over the specified voltage or current.
- Do not leave any part unsecured. Movement over time from weather can cause damage.

**General Material/Tool Requirements:**

Material needed for installation:

- CLBT Linerar Tube(s)
- Phillips Screw Driver
- Silicone Sealant
- Measuring tape

1. CLBT comes with two mounting clamps. Remove from packaging. (Fig. 1)
2. Position mounting clamps 3 inches from the edge of the CLBT.
3. Install CLBT mounting clamps to desired surface using appropriate hardware for application.
4. Install CLBT to the mounting clamp by sliding the flanged lip into the U channel on the clamp.
5. Tighten screws on sides to secure fixture. (Fig. 1)
6. For additional fixtures repeat steps 1-4.
7. Connect waterproof male and female connectors. After connection, tuck in wireway cavity. (Fig. 2)
8. Tighten screws on side to secure fixture. (Fig. 1)
9. Plug power cord(s) into GFCI receptacle.

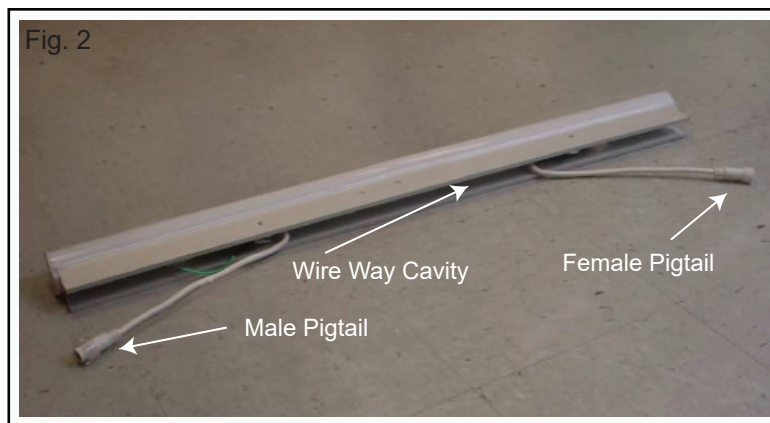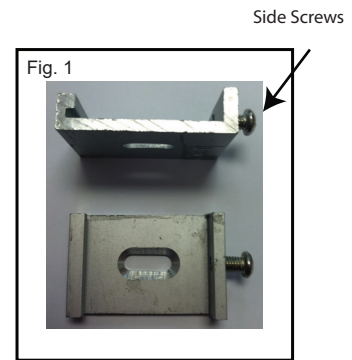

**TROUBLE SHOOTING**

Product will not light

- Verify units are plugged in correctly
- Check the GFCI to see if it is tripped.