



## IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

When using electrical equipment, basic safety precautions should always be followed including the following:

- **DISCONNECT AC POWER SUPPLY BEFORE SERVICING.**
- Installation and servicing of this equipment should be performed by qualified service personnel only.
- Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable.
- Do not mount near gas or electrical heaters.
- Do not use outdoors.
- Equipment should be mounted in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Any modification or use of non-original components will void the warranty and product liability.
- Do not use this equipment for other than intended use.

## SAVE THESE INSTRUCTIONS!

Technical Support ■ (623) 580-8943 ■ [technicalsupport@barronltg.com](mailto:technicalsupport@barronltg.com)


# DMX-RGBW-WHEEL

## Installation Instructions


**specialtyLED**  
commercial & decorative lighting

1. Install the junction box into the wall. (Fig. 1)
2. Use screwdriver to gently pry out the backplate from the touch panel. (Fig. 2)
3. Screw the backplate and junction box firmly into the wall. (Fig 3)
4. Make proper connections and place power adapter inside junction box. (Fig. 4)
5. Place the touch panel into the backplate. Then, push the bottom of touch panel into the slot. (Fig. 5)


**Fig. 1**




**Fig. 2**

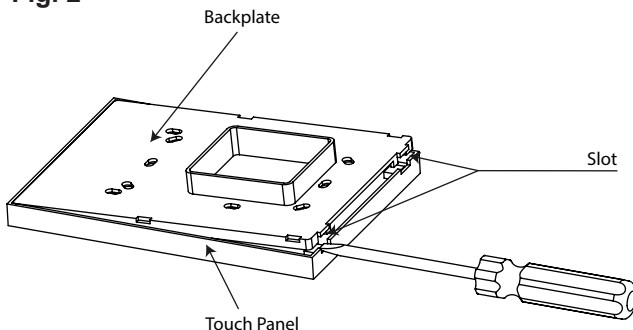



**Fig.3**

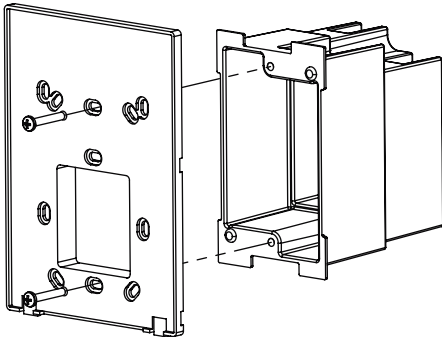

**Fig.4**

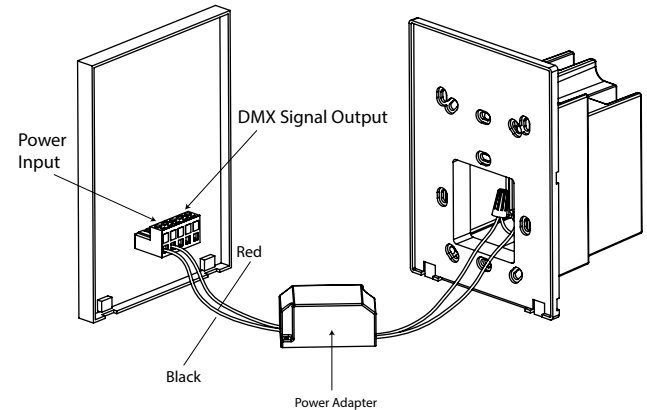


**Fig. 5**

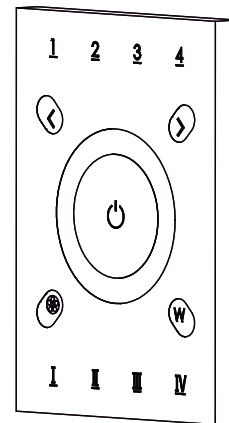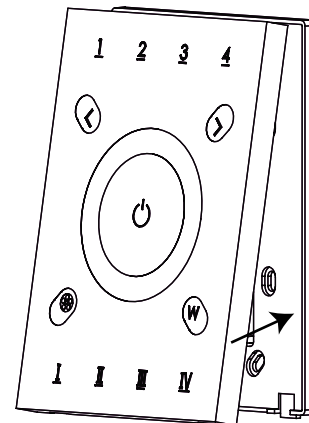

# DMX-RGBW-WHEEL

## Installation Instructions

### Key Functions



1 2 3 4

LTech

Speed/Brightness +/-

On/Off


Touch Circle

White Key  
Press: Turn on/select  
Long press: Dimming

Mode Key

Scene-mode keys  
Short press: play  
Long press: save

I II III IV

The Changing Mode (Press  to Select)

1. Static Red
2. Static Green
3. Static Blue
4. Static Yellow
5. Static Purple
6. Static Cyan
7. Static White
8. RGB Jumping
9. 7 Colors Jumping
10. RGB Smooth
11. 7 Colors Smooth
12. Static Black

Fig. 6


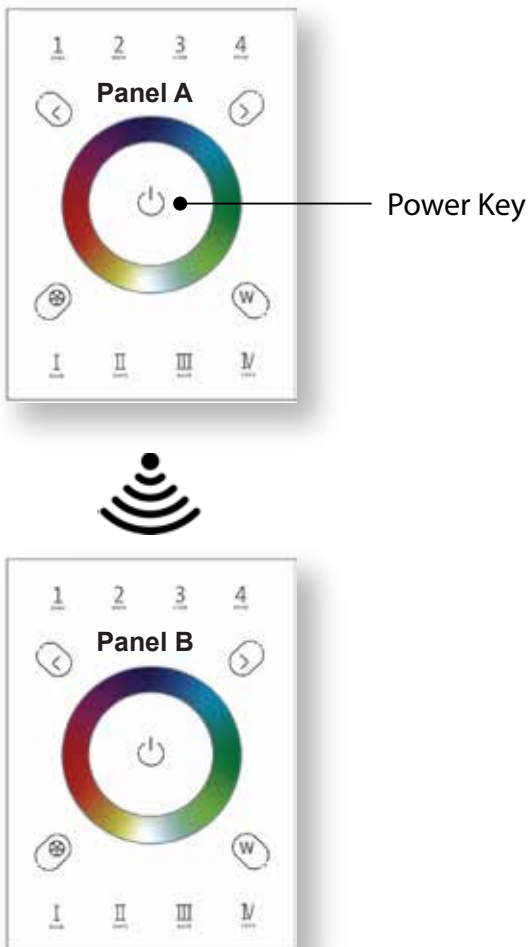


Fig. 7

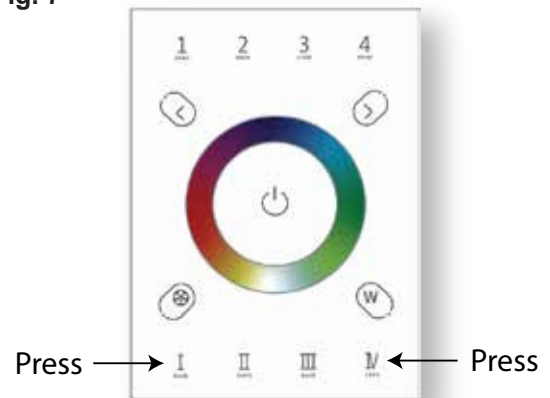

5. Press and hold the power key on the panel for three seconds. The panel light on Panel A should turn on. (Fig. 6)
6. Press any key on any zone of Panel B. If the indicator lights on Panel A stop blinking, the connection is successful. (Fig. 6)
7. Press keys I and IV simultaneously for more than six seconds to deactivate and clear code. If the light indicator blinks three times, it has been successfully deactivated. (Fig. 7)

# DMX-RGBW-WHEEL

## Installation Instructions

**specialtyLED**  
commercial & decorative lighting

### DMX Output Wiring

