



Project: _____

Type: _____

Comments: _____

Prepared by: _____

1000W 120~277VAC ELECTRONIC SWITCHABLE BALLAST

FEATURES

- F.A.T. Frequency Adapting Technology fires ALL single-ended (SE) and double-ended (DE) lamps including high-frequency DE lamps
- MH/HPS switchable up to 1000W
- Generator ready
- Delayed ignition stabilizes start-up loads and extends lamp life
- Four (4) switchable wattage settings (400W SE, 600W SE, 1000W SE, 1000W DE)
- 120/208/240/277VAC voltage sensing input
- Standard S-Type lamp connector
- LED status/wattage indicators
- Built-in fan for cooling
- 6' 120VAC power cord provided
- UL Listed for damp location
- Three (3) year warranty


PROTECTIONS

- Short circuit
- Ignition failure
- Overheat
- Over voltage
- Fan failure
- Open circuit
- End of Lamp Life (EOL)
- Soft-start
- Low voltage

PERFORMANCE

- Rated Voltage: AC90-305VAC
- Input Frequency: 50/60Hz
- Ambient operating temperature (TA): -40°C to 50°C
- Crest Factor (CF): <1.5
- Power Factor (PF): ≥0.99
- Total Harmonic Distortion (THD): <10%
- Current draw: 8.6AW @ 120VAC, 4.1A @ 240VAC, 3.8A @ 277VAC

DIMENSIONS

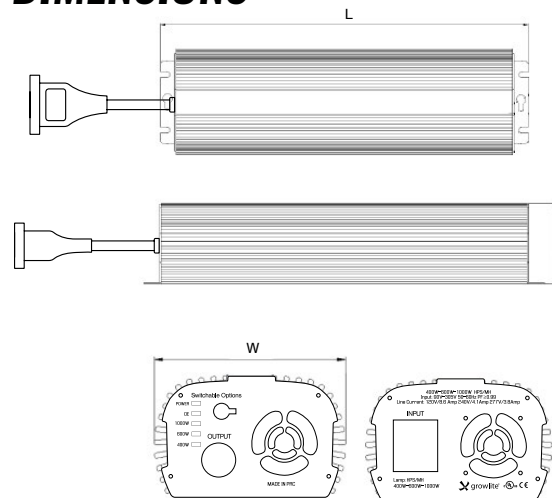

Dimensions: L 15.2" x W 4.4" x H 2.8"

Packaged Weight:
7.4 lbs / 3.3 kgs

Installed Weight:
6.6 lbs / 3.0 kgs

Item No. GLB-1000-DE-120/277

GROWLITE.COM

7885 N Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948

Specifications are subject to change without notice.



*Lamps and reflectors sold separately