

HDE

315 / 600-1000W Horticultural Double-Ended (DE) Lamp Concealed Vacuum Airflow Technology[®] Reflector

The only double-ended horticultural reflector with Concealed Vacuum Airflow Technology[®], the HDE combines proven lamp performance with the ability to transfer heat easily from the grow environment. The HDE has flexibility and versatility built into the design with 4-way 8" ducting and included adapters. Growers can customize the HDE as needed for specific grow room applications. A-hinged lens and innovative reflector installation make cleaning and maintenance of the HDE extremely easy.




FEATURES

- Patented Concealed Vacuum Airflow Technology[®] (CVAT) maximizes the hood's photometric performance and thermal dissipation
- Includes 4-way, field-selectable 8" removable flanges, solid plates, and louvered plates for fully sealed air-cooled or non air-cooled operations
- Redesigned sockets make re-lamping easy
- Removable 1/8" thick tempered glass door for optional air-cooled or non air-cooled operation
- Durable black powder coated finish



SPECS

- Constructed of heavy-duty 22 gauge steel
- Removable door for easy lamp access and cleaning
- Standard with 15' cord and ballast plug
- One (1) pair of V-hooks for mounting
- 315W / 600W-1000W HPS DE standard or high frequency lamps
- ETL Listed for Damp Locations
- Five year warranty

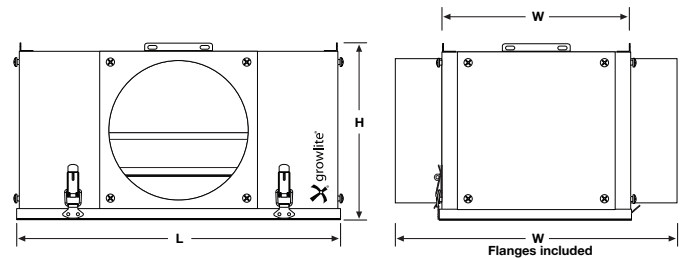

DIMENSIONS

Model	L"	W"	H"
GLH-HDE-8	17.5"	10.5"	9.8"
8" Ducts Included (add 5" per Length or Width)	22.5"	15.5"	9.8"

WEIGHTS

Model	Installed Weight	Packaged Weight
GLH-HDE-8	16.6 lbs (7.5 kgs)	18.6 lbs (8.4 kgs)

ORDERING INFORMATION

Example: GLH-HDE-8

Series/Configuration	Description
GLH-HDE-8	HDE-8 Reflector only
GLH-HDE-8-1000-HPS-120/277	HDE-8 Reflector, 1000W HPS DE lamp, digital ballast
GLH-HDE-8-315-CSI-120/277	HDE-8 Reflector, 315W CMH DE lamp, 315W digital ballast

*Consult factory for additional accessories