

**DESCRIPTION**

The LE-SW2 is a Bluetooth enabled, battery powered wall switch to manage luminaires. The switch can be linked to one or more luminaires or groups of luminaires via the LiteLogic app. It can be used to easily retrofit existing wall switches with the included wallplate, and the switch itself can be removed and used remotely.

**FEATURES & BENEFITS**

- Includes LiteLogic wireless Bluetooth® mesh technology
- Can be linked to one or more groups via the LiteLogic smart phone app
- Can control up to three scenes
- Easily go back to auto setting with one button
- Low power indicator light
- Can be taken off wallplate and used as a remote
- Available wallplate accessory for easy installation (LE-WP)

**SPECIFICATIONS**

**Electrical:**

- Input Voltage: 3VDC/5V USB

**Bluetooth:**

- Transmit Range: 100' max
- Radio Frequency: 2.4GHz ± 75MHz
- Bluetooth Version: 4.2

**Construction:**

- Housing: UL 94-V0
- IP Rating: IP20, Indoor Use Only
- Finish: White
- Operating Temperature: -18°C to 50°C (-4°F to 122°F)
- Storage Temperature: 0°C to 30°C (32°F to 86°F)


**Testing & Compliance:**

- UL Listed, complies to UL 1376, RohS (UL model: WP1025)

**Warranty:**

- Five year warranty (terms and conditions apply)


**Dimensions**

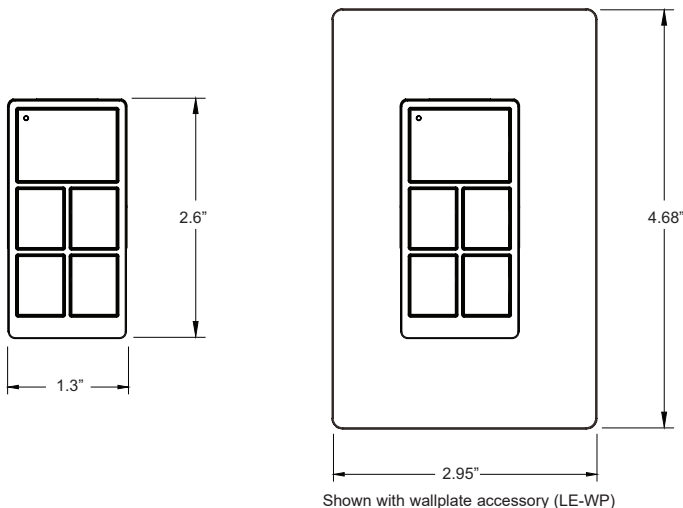

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
 Accessories: \_\_\_\_\_  
 Job Name: \_\_\_\_\_ Type: \_\_\_\_\_



Shown with wallplate accessory (LE-WP)



**ORDERING INFORMATION** (Example: LE-SW2)

Model	Description	Accessories (Order as separate line item)
LE-SW2	Bluetooth Battery Powered Wall Switch, 5 Button, White Finish	LE-WP = Wallplate, White Finish

Specifications are subject to change without notice. Installation must be performed in accordance with Barron Lighting Group installation instructions.