



EXITRONIX®
emergency lighting

barronltg.com



WET LOCATION LED EMERGENCY LIGHTING

Fully adjustable high-intensity LED lamps.

Standard narrow (12°) or optional wide (58°) optics available.

Optional 25W extended run time or remote capacity.

Impact-resistant, design offers extreme protection, IP66 Rated.

Guardian Self-test/Self-diagnostics (G2) standard.

CP-EMW Series

WET LOCATION LED EMERGENCY LIGHTING

Engineered for strength and reliability with an aesthetically appealing architectural look, the CP-EMW Series is ideal for any commercial environment where emergency units are required. With its heavy-duty lens, superior circuitry and gaskets to seal and protect the unit, the CP-EMW Series braves the most adverse conditions from extreme weather and high vandalism locations to heavy industrial applications.




FEATURES & BENEFITS

- Fully adjustable high-intensity LED lamps - up to 50' on-center spacing
- Standard narrow (12°) optics, optional wide (58°) optics available
- Standard 6V, 8W; optional extended run time or remote capacity
- Impact-resistant, polycarbonate shield offers extreme protection
- Guardian Self-test/Self-diagnostics (G2) standard
- IP66 Rated
- Assembled in USA




SPECIFICATIONS

Illumination:	3.6W LED lamp heads
Housing:	Die-cast aluminum backplate, fully gasketed and sealed with durable powder coat finish
Input:	120/277VAC Dual primary, 60Hz
Battery:	Maintenance-free NiMH battery
Run Time:	UL Listed 90 minute emergency run time, 24 hour recharge time
Electrical:	Low voltage disconnect eliminates deep discharge
Mounting:	Universal J-box mounting system and top mounted conduit entry, other options available
Finishes:	Bronze or Satin Aluminum
Options:	TRH = Tamper-Resistant Hardware WL = Wide 58° optics
Operating Temp:	0°C to 50°C (32°F to 122°F)
Certifications:	cULus 924 Listed for Wet Locations, meets or exceeds NEC requirements and NFPA 101, IP66 Rated
Warranty:	Five years with a separate five year prorated warranty on the battery. See the full Exitronix warranty document for detailed information.

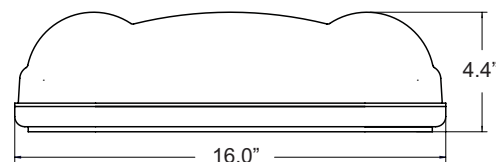

Weight

8W = 6.5 lbs
25W = 9.2 lbs



ORDERING INFORMATION (Example: MSA-600-AO)

Series	Watts	Lamps	Finish	Options (Factory Installed)
CP-EMW	8 ¹ = 8 Watts	LED = 3.6 Watt LED	BR = Bronze	TRH = Tamper-Resistant Hardware
	25 ² = 25 Watts		SA = Satin Aluminum	WL = Wide 58° optics

Specifications are subject to change without notice.
Installation must be performed in accordance with
Barron Lighting Group installation instructions.

10840121 MKT-LIT-CP-EMW Rev 7



7885 North Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948
barronlitg.com