

COMPETITIVE ARCHITECTURAL WALLPACK



TRACE LITE
commercial & industrial lighting

barrontg.com

Die-cast design in two
physical sizes.

From 3360 to 9800 lumens with
uniform Type III distribution.

Integral sensor and battery
backup options.


**70% ENERGY
SAVINGS**

REPLACES UP TO 400W HID

E110 SERIES

COMPETITIVE ARCHITECTURAL WALLPACK

The E110 Series is a traditional full cutoff geometric sconce designed for optimal light control and distribution. Its die-cast aluminum construction provides ideal thermal management. Lumen packages from 3360 to 9800 are available in 4000K and 5000K CCT and a Type III distribution. This product offers project flexibility with photocontrol, integral motion sensor and battery backup options. The E110 is DLC Qualified for maximum energy savings and utility rebates. This family of product is offered in two housing sizes to complement new construction or retrofit applications, accommodating mounting heights up to 30'.

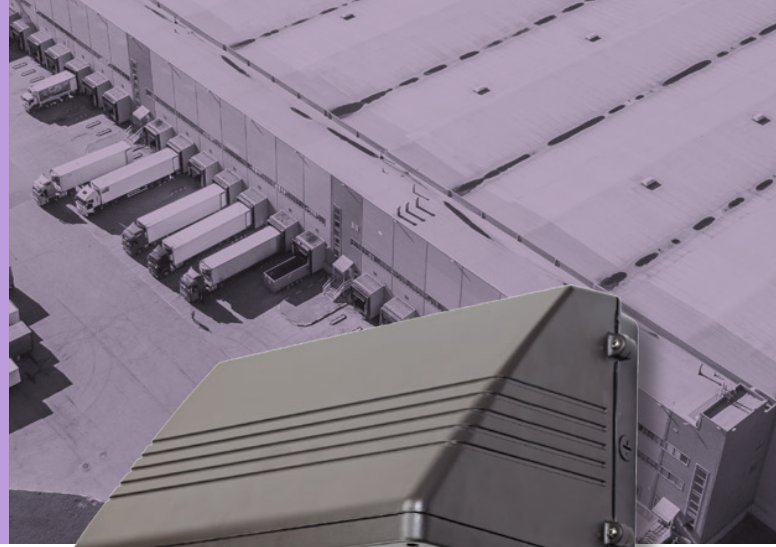


Key Features

- Die-cast aluminum housing that matches traditional HID product; perfect for retrofit applications
- Heatsink designed to transfer heat away from the LEDs for longer life
- Lumen packages up to 9800 lumens
- Efficacies up to 113 LPW for energy savings and utility rebates
- Type III distribution ideal for safety and building security
- Integral sensor and battery backup options for project flexibility
- UL Listed for Wet Locations



Dimensions

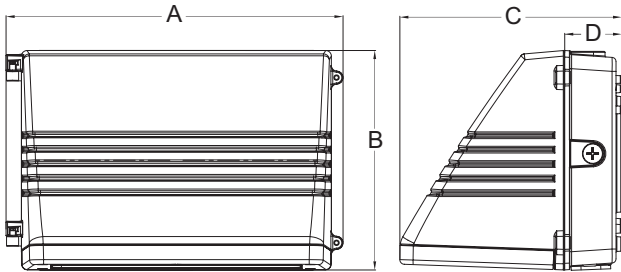

Model	A	B	C	D
E110-30	14.2"	9.8"	8.8"	2.5"
E110-45	14.2"	9.8"	8.8"	2.5"
E110-90	18.1"	9.8"	11.2"	2.5"

Specs at a Glance

Model	E110-30	E110-45	E110-90
Wattage (W)*	30W	45W	90W
Lumens (lm)	3360	4900	9800
Efficacy (LPW)	113	108	109
Equivalency (HID)	100-150 Watt	175-250 Watt	250-400 Watt
Distribution	Type III		
CCT (K)	4000K, 5000K		
CRI	≥80		
Input Voltage	120-277VAC, 50/60Hz		
Operating Temp	-40°C to 50°C (-40°F to 122°F)		
Certifications	cULus Listed for Wet Locations, DLC		
Warranty	5 Years		
Weight	9.8 lbs	9.8 lbs	15.0 lbs

* Nominal Wattage. Tested at 5000K CCT. See performance table for more detailed lumen information.

Note: Environment and application will affect actual performance. Typical values and 25°C used for testing.

Ordering Information Example: E110-45-VS-4K-BR-BB

Series	Wattage	Input Voltage	CCT	Finish	Options	Accessories ¹ (Field Installed)	
E110	30 = 30W	VS = 120-277VAC	4K = 4000K	BR = Bronze	BB = Battery Backup	PCU = 120-277VAC Button Photocontrol	
	45 = 45W				5K = 5000K	SC = Dimming Sensor	TL-MSSW = Dimming Sensor
	90 = 90W				PC = Button Photocontrol 120/277VAC	TL-MSSW-REMOTE = Remote for Sensor	

Notes

¹ Order as a separate line item. Shipped in a separate box for final installation in the field



800.533.3948 | barronltg.com

MKT-LIT-E110 10840338 02/19