



EXITRONIX
emergency lighting

barronltg.com

NEW YORK CITY APPROVED NEMA 4X LED EXIT

**Suitable for Wet Locations & NEMA 4X applications.
Fully illuminated 8" characters with 1" stroke.
Long-life, high-intensity, red LEDs.
Fully gasketed enclosure, field-selectable chevrons.**

NYN4X Series


NEW YORK CITY APPROVED NEMA 4X LED EXIT

The NYN4X Series is engineered to withstand extreme conditions. This NYN4X Exit sign meets or exceeds NEMA 4X and City of New York code requirements. The NYN4X Series can be used in parking garages, breezeways and other environments where additional protections are needed due to weather conditions.



FEATURES & BENEFITS

- New York City Approved
- Suitable for Wet Locations and NEMA 4X applications
- UL 924 Listed 90 minute emergency run time, 24 hour recharge time
- Fully illuminated 8" characters with 1" stroke
- Assembled in USA with global components

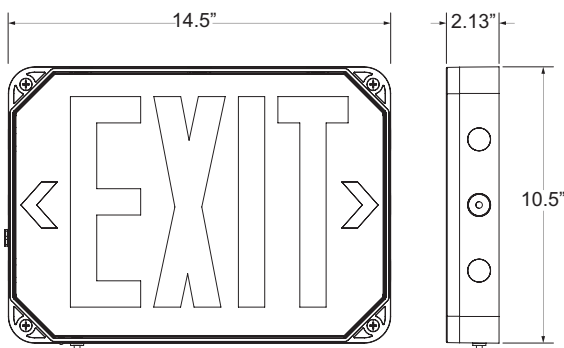

SPECIFICATIONS

Illumination:	Long-life, high-intensity, red LEDs
Legend:	Fully illuminated 8" characters with 1" stroke
Construction:	NEMA 4X rated polycarbonate, fully gasketed enclosure with field-selectable directional chevrons
Input:	120/277VAC Dual primary, 60Hz
Battery:	Maintenance-free NiCad battery
Operating Temp:	0°C to 40°C (32°F to 104°F)
Run Time:	UL Listed 90 minute emergency run time, 24 hour recharge time
Mounting:	Universal knockout pattern on backplate for back mount; optional pendant mount
Finish:	White
Certifications:	UL 924 Listed for Wet Locations, NEMA 4X rated, Meets or exceeds NFPA 101 Life Safety Code, NEC, OSHA and New York City Code requirements
Warranty:	Any component that fails due to a manufacturing defect is guaranteed for five years with a separate five year prorated warranty on the battery. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information. (Terms and Conditions apply)

ORDERING INFORMATION (Example: NYN4X-1-WB-R-WH)

Series	Style	Power Source	Legend	Finish	Accessories ¹ (Field Installed)
NYN4X	1 = Single-face	LB = AC Only WB = NiCad Battery	R = Red Letters	WH = White	ER1-KIT-WH-ADPTR = 1' Pendant Mount Kit ER2-KIT-WH-ADPTR = 2' Pendant Mount Kit

Notes

¹ Order as separate line item



Specifications are subject to change without notice.
Installation must be performed in accordance with
Barron Lighting Group installation instructions.

10840459 MKT-LIT-NYN4X Rev 3



7885 North Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948
barronllg.com