



specialtyLED
commercial & decorative lighting

barrontg.com

DOTLESS LED TAPE LIGHT

Extremely thin, flexible design.

Bright, uniform illumination with no visible LEDs.

Up to 304 lumens per foot.

2700K, 3000K and 4000K CCT.


Easy installation.

RFX-COB Series

DOTLESS LED TAPE LIGHT

The specialty LED RFX-COB Series features an extremely thin design that provides an even illumination across the entire strip with no visible LEDs. The RFX-COB is extremely flexible and its low-profile design makes it perfect for any small or restricted locations.


The RFX-COB is sold as a kit containing (3) splice connectors, (3) strip to power connectors and (3) flex corner connectors.

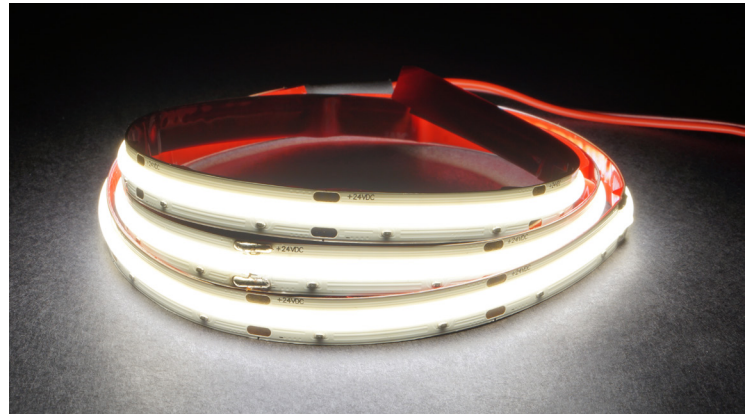

SPECIFICATIONS

CCT	2700K, 3000K, 4000K
Input	24VDC
LEDs/Foot	161 LEDs/Foot
Lumens/Foot	304 Lumens/Foot
Wattage/Foot	2.88W/Foot
Run Length	16.4' Max
Cutting Increments	1.97"
Certifications	Meets IP20 Rating
CRI	>90
Dimming	10% with Dimming Driver (Sold Separately)
Mounting	3M Adhesive Tape (Attached)
Operating Temp	-25°C to 40°C (-13°F to 104°F)
Warranty	5 Years

PHOTOMETRICS

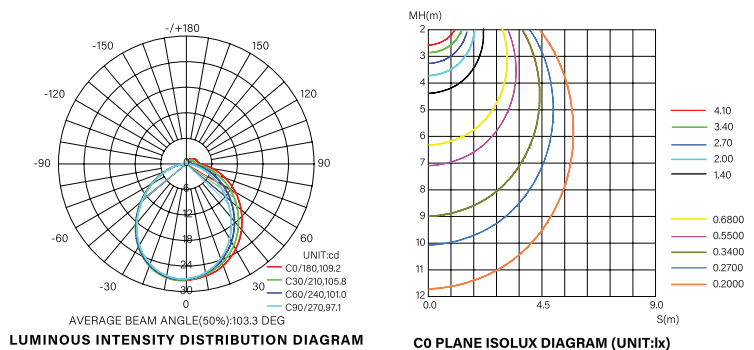

ORDERING INFORMATION Example: RFX-COB-27-16-24

Series	CCT	Length	Voltage	Accessories (Order as separate line item)
RFX-COB	27 = 2700K	16 = 16.4 Feet	24V = 24 Volt DC	RFX-COB-CSP = LED Strip to Power Supply Connector, 2" Wire leads, 10A Max
	30 = 3000K			RFX-COB-CSS-FLEX = LED Strip to LED Strip Connector, 2" Wire Extension For Corner Connection, 10A Max
	40 = 4000K			RFX-COB-CSS = LED Strip to LED Strip Connector, 10A Max
				Compatible Dimming Transformers
				Compatible Non-Dimming Transformers
				Linear Mounting Channels



Specifications are subject to change without notice.
Installation must be performed in accordance with
Barron Lighting Group installation instructions.

10840508 MKT-LIT-RFX-COB



7885 North Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948
barronltg.com