



VEX-WP

WET LOCATION CAPABILITY

LED PERFORMANCE

EXCEPTIONAL VALUE

FEATURES

- Ideal for wet location applications in extreme conditions
- Rugged, injection-molded UL94 V-0 flame retardant, high-temperature polycarbonate housing
- Impact-resistant, polycarbonate shield offers extreme protection
- One-piece, molded, weather-proof silicone gasket
- Charge rate/power "ON" LED indicator light with test button
- Standard internal battery heater for cold locations (-20°C - 50°C)
- Low voltage disconnect eliminates deep discharge
- Brown-out, short circuit and voltage surge protection
- Overcharge protection
- UL recognized maintenance-free NiCad battery
- UL listed 90 minute emergency run time, 24 hour recharge time
- Universal Mounting - Ceiling, back or end mount
- Constant, uniform illumination by long-life, high intensity, red or green LEDs
- Universal J-Box mounting system
- Fully-illuminated 6" characters with 3/4" stroke
- Optional Guardian Self-Test/Self-Diagnostics (G2) available
- Chevron-style, universal arrow
- 120/277V dual primary, 60Hz input
- Standard finishes: Black, white or gray




The VEX-WP is an exceptional blend of style and economy for any outdoor application. A fully-gasketed lens and housing enable the VEX-WP to perform well in wet location installations.



WARRANTY

Any component that fails due to manufacturers defect is guaranteed for 5 years with a separate 5 year pro-rated warranty on the battery. The warranty does not cover physical damage, abuse or acts of God. Manufacturer reserves the right to charge for such repairs if deemed necessary.

SPECIFICATIONS ARE SUBJECT
TO CHANGE WITHOUT NOTICE

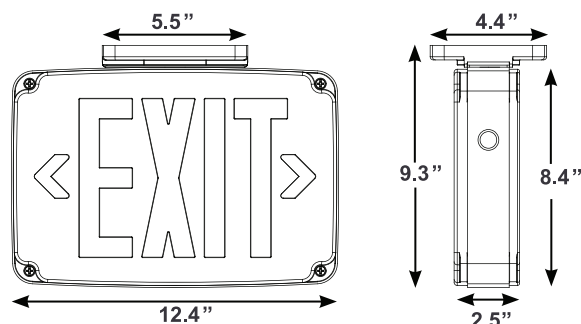

ORDERING INFORMATION Example: VEX-WP-1-WB-WH-G2

Series	Style	Power Source	Finish	Options (Factory Installed)	Accessories ³ (Field Installed)
GVEX-WP = Green	1 = Single-face	LB = AC Only	BL = Black	2CI ¹ = 2 Circuit Input	VEX-WP-TRH = Tamper-Resistant Hardware
VEX-WP = Red	2 = Double-face	WB = With Battery	GR = Gray	G2 ² = Self-test/Self-diagnostics	
WH = White					
Notes				Note: See Specialty Signage specification for custom/alternate legends	
¹ Not available with WB option				See Social Distance Signage specification for social distancing legends	
² Not available with LB option					
³ Order as separate line item					



1911 W. Parkside Lane • Phoenix, AZ 85027
(800) 533-3948 • Fax: (623) 580-8948
www.barronltg.com