


WLZ-CP SERIES

ZERO UPLIGHT LED COMBO




THREE
SWITCHABLE
WATTAGES



THREE
SWITCHABLE
CCT OPTIONS

II
III
IV

THREE
DISTRIBUTIONS
INCLUDED

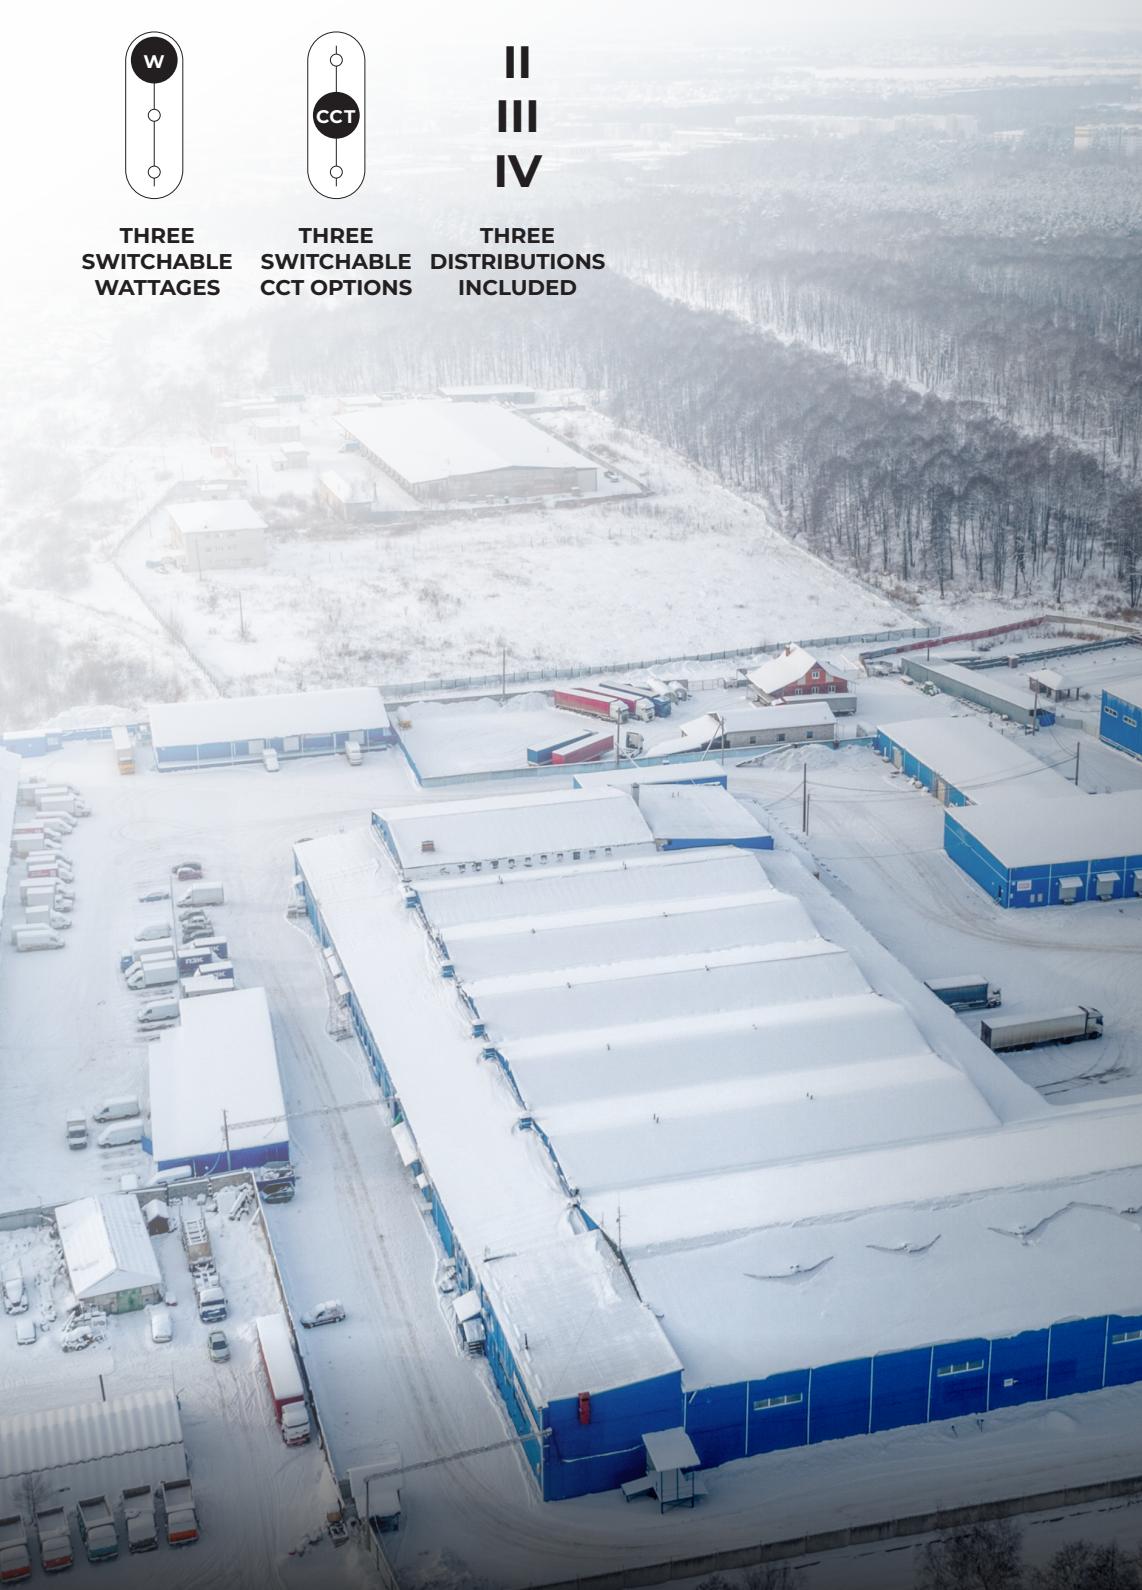

WLZ1-CP



(10W-15W-18W)

WLZ2-CP



(25W-35W-45W)

WLZ3-CP



(50W-65W-80W)

WLZ4-CP



(90W-110W-130W)

THE **WLZ-CP SERIES** ELEVATES ARCHITECTURAL LIGHTING WITH A SLEEK, **LOW-PROFILE LED DESIGN**, NOW OFFERING **LUMEN PACKAGES FROM 1,340 TO 19,120 LUMENS**. ENGINEERED WITH A HIGH-EFFICIENCY LIGHT ENGINE, IT DELIVERS OPTIMAL LIGHT CONTROL AND DISTRIBUTION WITH **ZERO UPLIGHT**.



KEY FEATURES

- Available in four housing styles and lumen packages
- Field-switchable power and CCT
- Field swappable lenses:
 - Factory installed Type III distribution, Type II and IV included in the box
- Die-cast aluminum construction
- Stainless steel hardware
- Powder coated finish in black, bronze, gray aluminum or white
- Hinged backbox with four 1/2" NPT conduit hubs
- Built in 3.5mm AUX receptacle

AVAILABLE OPTIONS

- 90 CRI
- Battery Backup
- Cold Location Battery Backup (operation down to -20 °C)
- Dual Drivers
- Surge Protection
- Photocontrol
- A factory installed module is available to lock the fixture to 3000K CCT for **Dark Sky IDA Compliance**



ORDERING INFORMATION

 (Example: Example: WLZ1-SD-VS-CP-BR)

Series	Distribution	Input Voltage	CCT	Finish
WLZ1 = Extra-Small, 10W-15W-18W	SD ¹ = Type II, Type III, Type IV Lenses Included	HVS ² = 277-480VAC	CP = Color & Power Switchable	BL = Black
WLZ2 = Small, 25W-35W-45W		VS = 120-277VAC		BR = Bronze
WLZ3 = Medium, 50W-65W-80W				SV = Gray Aluminum
WLZ4 = Large, 90W-110W-130W				WH = White

Options

90 = 90CRI

BB³ = Battery backup

CL⁴ = Cold Location Battery backup (operation down to -20°C)

DD⁵ = Dual driver

PC³ = 120/277VAC Button photocontrol

SP = 120/277VAC Surge protection

SPH = 347/480VAC Surge protection

Accessories⁶ (Factory Installed - Order As Separate Line Item)

WLZ-DSFA = Factory installed module to lock CCT to 3000K CT for Dark Sky IDA Compliance

LiteLogic Accessories⁷ (Field Installed - Order As Separate Line Item)

LE-MS3W-KIT-BL-A = Bluetooth Enabled Dimming Occupancy Sensor, PIR, Black Finish

LE-MS3W-KIT-WH-A = Bluetooth Enabled Dimming Occupancy Sensor, PIR, White Finish

PCU = 120/277VAC Button photocontrol accessory

SC-MSP12-KIT-BL-A = Dimming Occupancy Sensor, PIR, Black Finish

SC-MSP12-KIT-WH-A = Dimming Occupancy Sensor, PIR, White Finish

TL-MSSW-REMOTE = Remote for Sensor

Notes:

¹ Unit comes with Type III lens installed

² WLZ2-CP, WLZ3-CP and WLZ4-CP only, compatible with SPH option only

³ Not compatible with HVS configurations, not needed for CL option

⁴ WLZ2-CP, WLZ3-CP and WLZ4-CP only

⁵ WLZ3-CP and WLZ4-CP only

⁶ Factory installed, order as a separate line item

⁷ Order as a separate line item. Shipped in separate box for final installation in the field

Specifications are subject to change without notice.
Installation must be performed in accordance with
Barron Lighting Group installation instructions.

10840542

BARRON
lighting group

7885 North Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948
barronlg.com