

DESCRIPTION

The LUCB LED Under Cabinet Lighting series offers uniform and efficient LED illumination. Available in lengths from 9" to 42", this low-profile luminaire features field-selectable color temperatures in 2700K, 3000K, 3500K, 4000K and 5000K CCT. Perfectly suited for new install or remodel applications, the slim design seamlessly integrates under cabinets and shelves for optimal task lighting. Enjoy easy installation with built-in driver, captive screws, and knockouts.

SPECIFICATIONS

Construction:

- Durable steel housing and polycarbonate lens
- Slim 1" profile
- Available in 7 lengths from 9" to 42"
- Snap-fit white housing and mounting plate for easy access and installation
- Rear and side panel punch-in electrical connectors for easy wiring
- On/Off rocker switch and color selection switch conveniently located on outside of enclosure

Optics/LEDs:

- · Easily switchable between 2700K, 3000K, 3500K, 4000K, and 5000K CCT
- CRI ≥90
- L70 > 100,000hrs

Electrical:

- Built-in integral 120V electronic driver, TRIAC dimmable
- **Testing & Compliance:**
- UL Listed for Damp Locations
- Energy Star certified
- Complies with FCC Part 15, class B
- · Complies with ANSI/IEEE C62.41.1-2002, surge immunity protection (2.5kV)

Morroptu





| Warranty: • Five year warranty (| (terms and condition | ons apply) | | | Captive Screws (pre-installed on each fixture) | Wire Connectors | 3/8" Die-cast Connector | |
|-------------------------------------|--|------------|---------|---------|--|--------------------|----------------------------|--|
| Specs at a Glance | | | | | | | * Nominal Watta | |
| Length | 9" | 12" | 18" | 21" | 24" | 33" | 42" | |
| Wattage (W)* | 5W | 5W | 9W | 9W | 9W | 14W | 18W | |
| Lumens (Im) | 334-412 | 390-450 | 673-770 | 665-764 | 696-803 | 1,064-1,245 | 1,315-1,543 | |
| ССТ (К) | 2700K-3000K-3500K-4000K-5000K (Switchable) | | | | | | | |
| Efficacy (LPW) | Up to 92 LPW | | | | | | | |
| CRI | ≥90 | | | | | | | |
| Input Voltage | 120VAC, 60Hz, Triac Dimmable | | | | | | | |
| Operating Temp | -20°C to 50°C (-4°F to 122°F) | | | | | | | |
| Certifications | cULus Listed for Damp Locations, Energy Star Rated | | | | | | | |
| Warranty | 5 Years | | | | | | | |


ORDERING INFORMATION

| Model | Description |
|-----------|---|
| LUCB-9-C | LED Under Cabinet, 9", 5W, 120VAC, Dimmable, Color Selectable 2700K-3000K-3500K-4000K-5000K CCT, White Finish |
| LUCB-12-C | LED Under Cabinet, 12", 5W, 120VAC, Dimmable, Color Selectable 2700K-3000K-3500K-4000K-5000K CCT, White Finish |
| LUCB-18-C | LED Under Cabinet, 18", 9W, 120VAC, Dimmable, Color Selectable 2700K-3000K-3500K-4000K-5000K CCT, White Finish |
| LUCB-21-C | LED Under Cabinet, 21", 9W, 120VAC, Dimmable, Color Selectable 2700K-3000K-3500K-4000K-5000K CCT, White Finish |
| LUCB-24-C | LED Under Cabinet, 24", 9W, 120VAC, Dimmable, Color Selectable 2700K-3000K-3500K-4000K-5000K CCT, White Finish |
| LUCB-33-C | LED Under Cabinet, 33", 14W, 120VAC, Dimmable, Color Selectable 2700K-3000K-3500K-4000K-5000K CCT, White Finish |
| LUCB-42-C | LED Under Cabinet, 42", 18W, 120VAC, Dimmable, Color Selectable 2700K-3000K-3500K-4000K-5000K CCT, White Finish |



l Wattage

Specifications are subject to change without notice. Installation must be performed in accordance with Barron Lighting Group installation instructions.

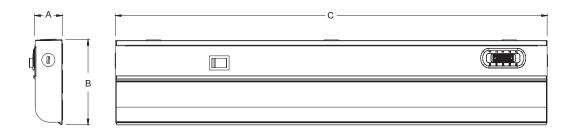

| Model | LUCB-9-C | LUCB-12-C | LUCB-18-C | LUCB-21-C | LUCB-24-C | LUCB-33-C | LUCB-42-C |
|--------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Α | 1" | 1" | 1" | 1" | 1" | 1" | 1" |
| В | 3.5" | 3.5" | 3.5" | 3.5" | 3.5" | 3.5" | 3.5" |
| С | 9" | 12" | 18" | 21" | 24" | 33" | 42" |
| Weight | 0.8 lbs | 1 lbs | 1.3 lbs | 1.6 lbs | 1.7 lbs | 2.4 lbs | 3 lbs |