

Our Massachusetts-approved exit sign combines versatility, accessibility, and code compliance in a single, easy-to-install unit. Constructed with durable extruded aluminum housing, ensuring long lasting strength, lightweight and resistant to corrosion. The premium aluminum design makes it ideal for both high traffic and long term installations.


### FEATURES & BENEFITS

- Meets State of Massachusetts Emergency Building Code requirements
- Faceplate includes "EXIT" legend with the ADA compliant, wheelchair accessibility symbol for the state of Massachusetts
- Universal single- or double-face design includes (2) faceplates, backplate and mounting canopy
- Buy American Act (BAA) compliant

### SPECIFICATIONS

Illumination:	Long-life, high-intensity, red or green LEDs.
Housing:	Extruded aluminum with power coated finish
Input:	120/277VAC dual primary, 60Hz
Battery:	Maintenance-free NiCad battery
Operating Temp:	10°C to 45°C (50°F to 113°F)
Run Time:	UL Listed 90 minute emergency run time, 24 hour recharge time.
Legend:	EXIT with ADA symbol, fully-illuminated 6" characters with 3/4" stroke and field-selectable directional chevrons
Mounting:	Ceiling, end or wall mounted, canopy included.
Finishes:	Black, Brushed Aluminum or White
Certifications:	UL 924 listed and meets or exceeds the following: UL 924, NEC requirements and NFPA 101
Warranty:	Any component that fails due to a manufacturing defect is guaranteed for five years with a separate five year prorated warranty on the battery. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information.

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
Accessories: \_\_\_\_\_  
Job Name: \_\_\_\_\_ Type: \_\_\_\_\_

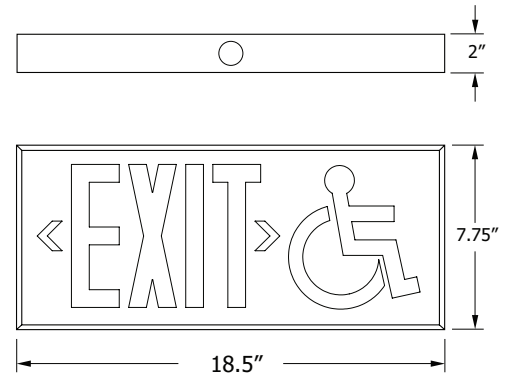

### ORDERING INFORMATION Example: MA400E-WB-WH-TF

Series	Power Source	Finish	Options (Factory Installed)	Accessories <sup>3</sup> (Field Installed)
MA400E <sup>1</sup> = Red Universal	LB = AC Only	BA = Brushed Aluminum	TF <sup>2</sup> = 120 Minute Run Time	ER1-KIT = 1' Pendant Mount Kit
GMA400E <sup>1</sup> = Green Universal	WB = With Battery	BL = Black		ER2-KIT = 2' Pendant Mount Kit
		WH = White		

#### Notes

<sup>1</sup> Includes (2) faceplates, backplate and mounting canopy

<sup>2</sup> Only compatible with "WB" power source

<sup>3</sup> Order as separate line item

Model	NiCad Battery	Brownout	Low Voltage Disconnect	Overload Disconnect	Short Circuit Disconnect	Solid State Transfer	Input			
							VAC	Hz	mA	W
MA400E-LB-XX	N/A	Yes	No	Yes	Yes	No	120/277	60	28.5/28.6	0.9/1.1
GMA400E-LB-XX	4.8V/400mAh	Yes	Yes	Yes	Yes	Yes	120/277	60	128/111	2.0/1.8

## CONSTRUCTION

The MA400E series exit is constructed of extruded aluminum. Universal chevron knockouts are concealed and easily removed. All units are supplied with mounting canopy for ceiling, wall or end mounting. Finish options include brushed aluminum, black or white powder coat.

Faceplate includes "EXIT" legend with the ADA compliant, modified wheelchair accessibility symbol for the state of Massachusetts. Stencil letters are 6" high with 3/4" stroke.

Universal single- or double-face design includes (2) faceplates, backplate and mounting canopy.

## ILLUMINATION

Illumination of the MA400E series is accomplished utilizing high-intensity, long-life red or green LEDs. LEDs provide excellent illumination while maximizing energy-efficiency and a maintenance-free solution.

## ELECTRICAL

### Input

Dual-voltage input 120/277VAC @ 60Hz.

### Nickel Cadmium Battery - NiCad

Extronix nickel cadmium batteries are maintenance-free.

## Emergency

The MA400E series exit will operate for a minimum of 90 minutes during a loss of power with a 24 hour minimum recharge time for the battery. An extended 120 minute battery is available with "TF" option.

## Test Button

Our easily located test button allows for manual verification of proper operation of the transfer circuit and emergency lamps.

## INSTALLATION

Installs in minutes with easy-to read instructions and detailed diagrams. No special hardware or tools necessary. Internally housed components and battery.

## MADE IN THE USA

Made in the U.S.A. and is in full compliance with the Buy American Act (BAA).

## CONFORMANCE TO CODES & STANDARDS

The MA400E Series is UL listed and meets or exceeds the following: UL 924, NEC requirements and NFPA 101.