

DESCRIPTION

The MRD Series is a remote driver box that provides power from outside the shielded MRI room. Available in 1 to 9 driver configurations with 0-10V dimming.

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____

SPECIFICATIONS

Installation:

- Remote-mounted power supply designed for installation outside the MRI room
- Individual quick-connects provided on each driver for simplified wiring installation

Construction:

- 16ga aluminum enclosure
- Optional Antimicrobial White Paint that inhibits growth of bacteria on the fixture surface

Electrical:

- 120/277VAC, 50/60HZ
- 0-10V 1% Dimming driver

Warranty:



- Five Year Warranty (Terms and Conditions Apply)




ORDERING INFORMATION (Example: MRD-S-1-AM)

Model	Size	Number of Drivers	Options
MRD	S = Small (Up to 6 Drivers)	1 = One Driver	AM = Antimicrobial White Paint
		L = Large (Up to 9 Drivers)	
		2 = Two Drivers	
		3 = Three Drivers	
		4 = Four Drivers	
		5 = Five Drivers	
		6 = Six Drivers	
		7 ¹ = Seven Drivers	
		8 ¹ = Eight Drivers	
Notes		9 ¹ = Nine Drivers	
¹ Not available in Small size			

DIMENSIONS

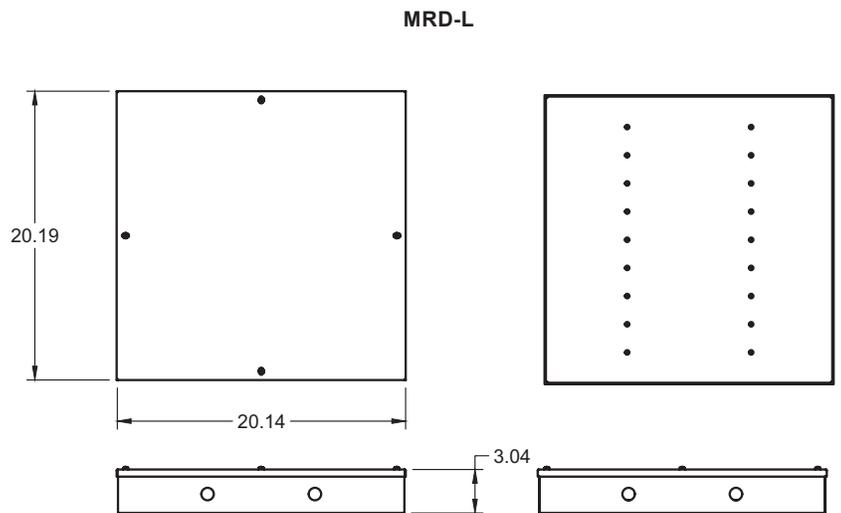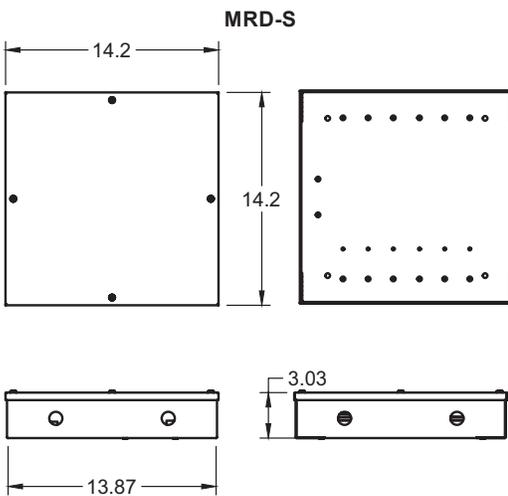

MRI ROOM SINGLE SUPPLY SYSTEM DIAGRAM MULTIPLE SHIELDING FEEDS

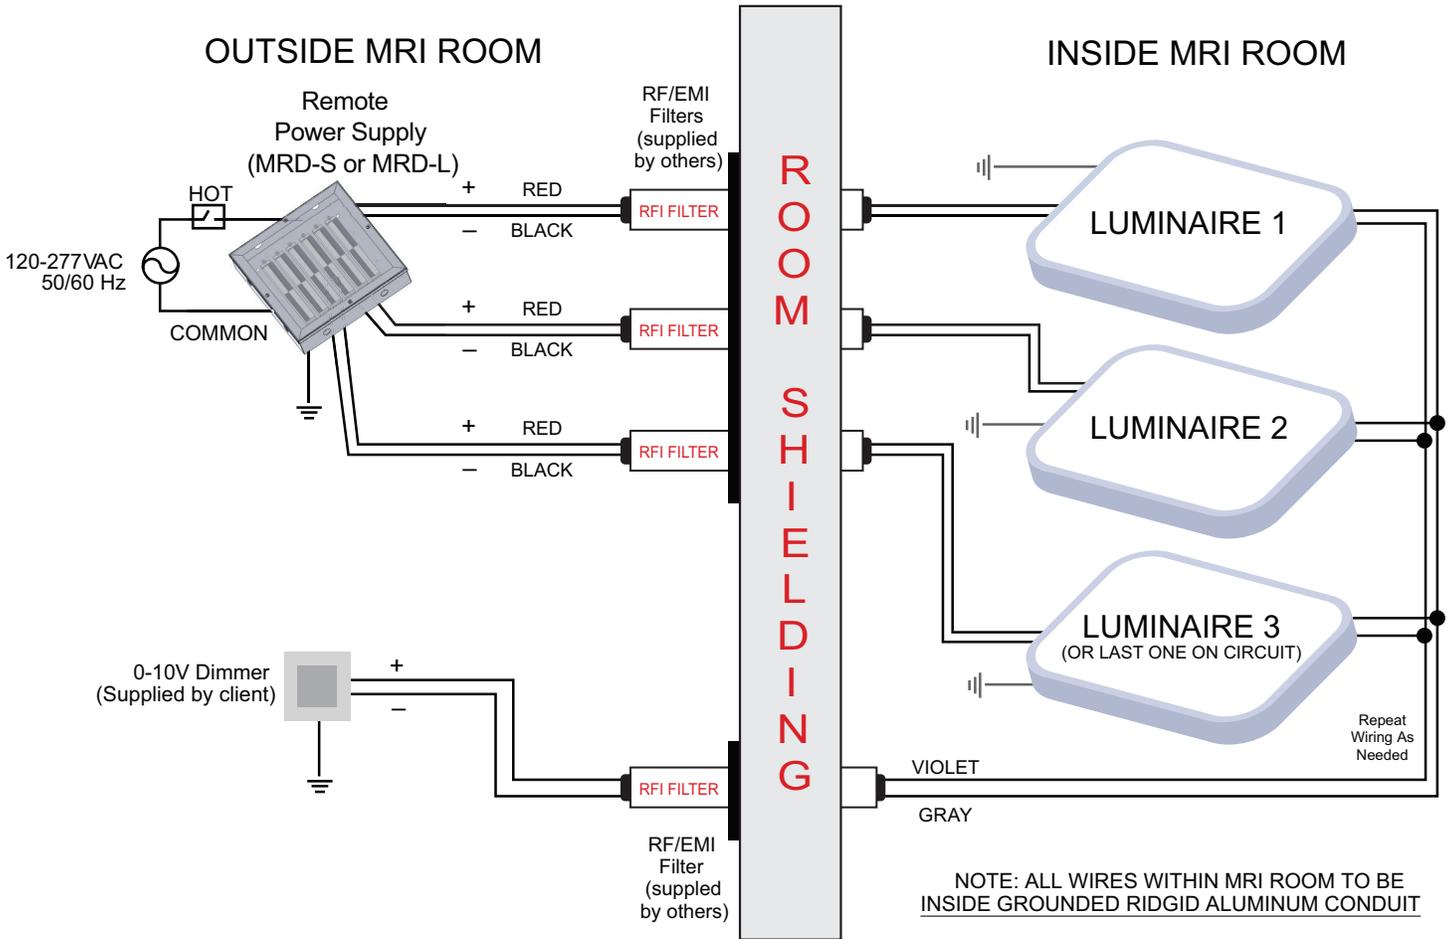

IMPORTANT: EACH FIXTURE REQUIRES IT'S OWN DRIVER