

#### DESCRIPTION

TRACE\*LITE's Nyte Forms series of LED luminaires is a versatile family of unique lighting fixtures that can be utilized to satisfy multiple application requirements, from wallpacks to floodlights or inverted for use as a wall washer. All Nyte Forms luminaires are equipped with state of the art LED light engines that offer standard 0-10V dimming with excellent efficacies and lumen outputs. The superior thermal management maximizes the reliability and longevity that SSL systems can provide. The TLED-NFS series has an efficacy of 92 LPW with a delivered output of 1322 lumens. State of the art technology combined with application versatility and design consistency makes our new Nyte Forms family of luminaires the logical choice for any project. Unit is now available with emergency battery backup providing emergency lighting at full lumen output.

#### SPECIFICATIONS

##### Construction:

The TLED-NFS has a precision designed aluminum housing with stainless steel hardware, tempered glass lens, silicone gaskets and a UV resistant, thermoset polyester powder coated finish. The TLED-NFS is completely sealed with silicone gaskets and is UL Listed for Wet Locations. The quick mount plate with built in bubble level allows for fast and easy installation. There is a knock-out in the top of the NFS housing to allow for the field installation of a photocontrol sensor. Thermal management is integral to the die-cast aluminum housing, with both the driver and the LED module each mounted directly to the housing in positions specifically designed to maximize heat dissipation and therefore increase the longevity reliability and performance of the TLED-NFS luminaire.

##### Optics:

The TLED-NFS series wallpack delivers exceptional light quality, with a standard correlated color temperature of 5000K with a CRI of  $\geq 70$ . The TLED-NFS LED light engine is fit with precision optical reflectors to distribute light forward and to the sides, producing an ideal wallpack distribution that maximizes fixture spacing while still delivering light where it is needed in the most efficient way possible. Producing 1322 delivered lumens, the TLED-NFS has an L70 of 100,000 hours.

##### Electrical:

The TLED-NFS includes 0-10V dimming as a standard option with LEDs powered by constant current, high efficiency Class 2 LED driver with active power factor correction (0.98 typical), wet location rating, all around protection against over-voltage, over-temperature, short circuit conditions, and lightning. The TLED-NFS driver has a standard voltage sensing input of 120~277VAC 50/60Hz. It features a Class A EMI rating and complies with UL8750 safety regulations and with ANSI/IEEE C62.41 Class A Operation. The TLED-NFS is suitable for operation in -31°F to 122°F (-35°C to 50°C) ambient conditions.

##### Thermal Management:

The LED module and driver are mounted directly to the purpose designed housing which functions as a dedicated, LEDLITE/logic thermal heat sink. The heat sink is unique and has been sized to maximize the thermal dissipation of the wallpack housing. This configuration optimizes the heat removal for the LEDs and the driver, which makes possible the high efficacy, lumen output and longevity of the TLED-NFS.

##### Environmentally Friendly Design:

TLED-NFS luminaires consume very little energy and provide long life in comparison to traditional lamp technologies. The TLED-NFS consumes only 14 watts, but the light output can be conservatively compared to a 100W HID luminaire of similar design. The TLED-NFS provides a significant reduction in KW load and carbon emissions.

##### Installation:

The TLED-NFS series features a back plate design that can be easily mounted to any vertical surface, and is readily wired to a recessed J-box. A 1/2" knuckle mount is included as standard for floodlighting applications. Suitable for inverted mounting. Optional tamper-resistant hardware is available for applications where there is a high rate of vandalism, theft or in high traffic public spaces.

##### Photocontrol (Accessory: PC):

Optional field installed photocontrol provides dusk-to-dawn security. Input voltage must be specified to match the input voltage that will power the fixture.

##### Testing & Compliance:

The reliability and performance of the TLED-NFS is evaluated in accordance with the parameters outlined and reported by LM-79 and LM-80 documents. Photometric data is tested to IESNA LM-79-08 standard by an independent testing laboratory. Lumen maintenance, or L70, a measure of long term reliability, is determined for the light source, which consists of the LED and PSB sub-assembly as installed in the luminaire, using LM-80 in-situ thermal and reliability data as provided by the LED manufacturer in accordance with DOE/EPA standards.

Model: \_\_\_\_\_ Date: \_\_\_\_\_

Accessories: \_\_\_\_\_

Job Name: \_\_\_\_\_ Type: \_\_\_\_\_

#### Available While Supplies Last



Specs at a Glance	
<b>Wattage (Nominal)</b>	14.4w
<b>Ingress Protection</b>	UL Listed for Wet Locations
<b>Lumens (5000K)</b>	1322
<b>Efficacy (5000K)</b>	92
<b>CCT</b>	5000K
<b>Input Voltage</b>	120~277 Voltage Sensing
<b>Optics</b>	Type II Very Short
<b>CRI</b>	$\geq 70$
<b>Warranty</b>	5 Years
<b>Ambient Temp</b>	-31°F to 122°F (-35°C to 50°C)

##### Listing:

The TLED-NFS is UL certified under UL1598 specifications and is UL Listed for Wet Locations in all mounting configurations.

##### Warranty:


Up to 5 year warranty; see TRACE\*LITE Terms and Conditions for details.

## Fixture Performance

Part Number	Total System Watts	Initial Lumens	Lumens Per Watt (LPW)	L70 Hours @ 25°C	BUG Ratings
TLED-NFS-14	14W	1322	92	100,000	B1-U0-G0

NOTE: Lumen maintenance and life (part of LM-80 data) are per published information from primary LED suppliers and is based on design operation at their specified thermal management and electrical design parameters.

## Dimensions

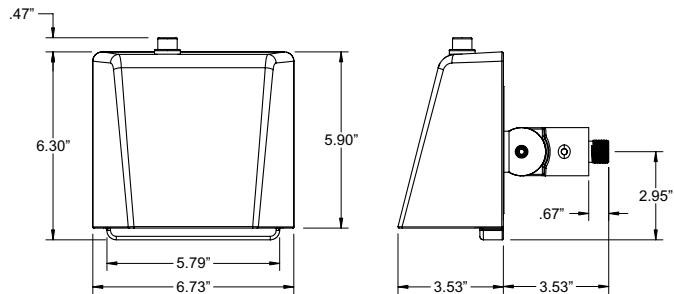

Approximate Weight: 4 lbs.

## Sample Photometrics


### TLED-NFS-14-VS-5K

IES: TYPE II VERY SHORT FULL CUTOFF

MOUNTING HEIGHT: 10 FEET

TILT: ZERO

HORIZONTAL SPACING CRITERIA: 1.38

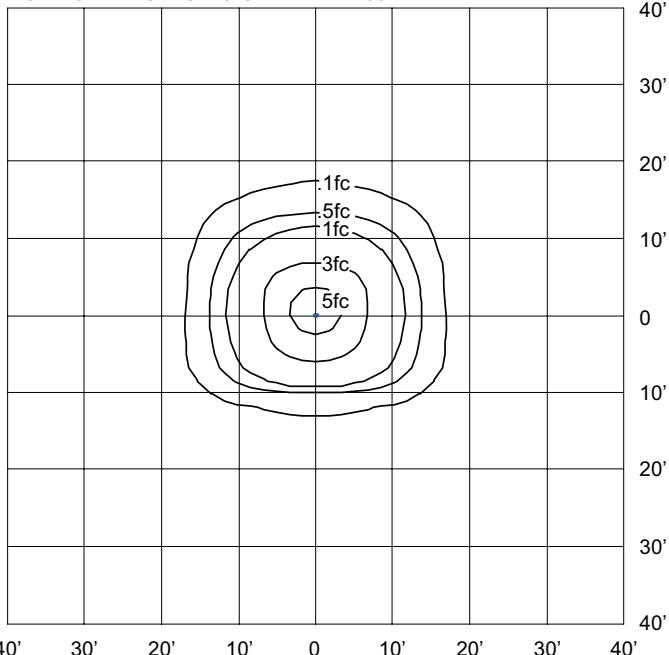

## Ordering Information

Example: TLED-NFS-14-VS-5K

Series	Nominal Wattage	Input Voltage	CCT Temperature	Finish	Accessories <sup>2</sup> (Field Installed)
TLED-NFS <sup>1</sup>	14 = 14 Watt	VS = 120~277VAC Voltage Sensing	5K = 5000K (Std.)	BLANK = Bronze (Std.)	PCU <sup>3</sup> = 120-277VAC Photocontrol

WH = White  
BL = Black

### Notes

<sup>1</sup> Includes 1/2" knuckle mount standard

<sup>2</sup> Order as separate line item

Specifications are subject to change without notice.  
Installation must be performed in accordance with  
Barron Lighting Group installation instructions.

10810300 Rev 10