



TRACE LITE
commercial & industrial lighting

barronltg.com

SURFACE MOUNT LED DOME DOWNLIGHT

Switchable CCT, 2700K, 3000K, 3500K, 4000K and 5000K.

Produces 960 lumens of soft, uniform illumination.

Mounts directly to 3" or 4" round or octagonal junction box.

Can easily retrofit 4" to 6" cans with included clips and E26 base.

Energy Star and California Title 24 JA8-2019 certified.

DDX Gen 1 Series

SURFACE MOUNT LED DOWNLIGHT

The DDX series is a 120V surface mount, LED dome downlight that provides project flexibility with field-selectable color temperature (2700K, 3000K, 3500K, 4000K, and 5000K CCT). The DDX offers 960 lumens and includes a simple snap-on mounting bracket to simplify installation directly to a junction box. The DDX can also easily retrofit 4" to 6" cans with its included friction clips and its E26 medium screw-base Edison connector. This fixture is not only Energy Star certified but is California Title 24 JA8-2019 compliant. This attractive surface mount downlight is ideally suited for residential, retail, light commercial and other interior spaces that utilize a traditional downlight or surface mount product.



FEATURES & BENEFITS


- Durable white thermoplastic construction
- Installs directly to a 3" or 4" round or octagonal junction box
- Fixture can also be mounted on 4" to 6" recessed housings using the included friction clip kit and E26 medium screw-base Edison connector
- Produces 960 lumens of soft uniform illumination
- Replaces up to 100W incandescent lamps
- 120° beam angle
- CCT Selectable; 2700K, 3000K, 3500K, 4000K and 5000K CCT
- L70 > 50,000 hours
- CRI ≥90
- 120VAC, 50/60Hz
- Triac/ELV dimming
- Power Factor > 0.90
- cULus listed for Damp Locations
- ENERGY STAR certified
- Certified to the high efficacy requirements of California Title 24 JA8-2019
- FCC Compliant
- Operating temperatures: -20°C to 40°C (-4°F to 104°F)
- Five Year Warranty (Terms and Conditions Apply)

SPECS AT A GLANCE

Diameter	7.3"
Wattage (W)*	12
Lumens (lm)	960
Efficacy (LPW)	80
Equivalency (W)	Up to 100W
CCT (K)	Switchable (2700K, 3000K, 3500K, 4000K, 5000K)
CRI	≥90
Input Voltage	120VAC, 50/60Hz
Operating Temp	-20°C to 40°C (-4°F to 104°F)
Certifications	UL Listed for Damp Locations, ENERGY STAR, California Title 24 JA8-2019, FCC Compliant
Warranty	5 Years

* Nominal Wattage, tested at 5000K CCT.

Note: Environment and application will affect actual performance. Typical values and 25°C (77°F) used for testing. Specifications subject to change without notice.

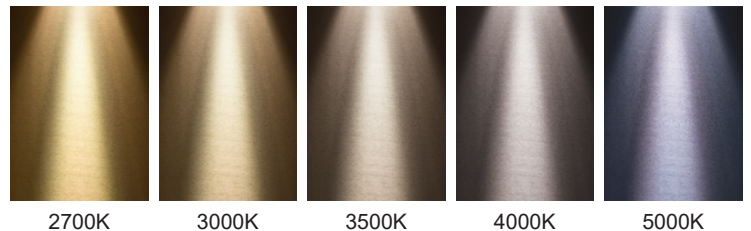

ORDERING INFORMATION (Example: DDX-D6-12-C5)

Model	Description
DDX-D6-12-C5	Surface Mount Downlight, 7", 12W LED, 120VAC, CCT Switchable (2700K-3000K-3500K-4000K-5000K), White Finish



Specifications are subject to change without notice.
Installation must be performed in accordance with
Barron Lighting Group installation instructions.

10840449 MKT-LIT-DDX Rev 1



7885 North Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948
barronlitg.com