

The HLR Series is a hazardous location emergency remote head constructed of fiberglass-reinforced polycarbonate in a gray finish. The sign is UL 844 and UL924 Listed and rated for use in: Class I, Division 2, Groups A, B, C & D. Enclosure is built as one piece with a UV stabilized polycarbonate lens, molded gasket and stainless steel hardware with optional tamper resistant hardware for extra protection and offers several levels of protection against the elements, including dust, dirt and water making it this remote fixture ideal for harsh environments.





FEATURES & BENEFITS

- Rated for Class 1, Division 2, Groups A,B,C, & D
- IP66 Rated for protection against the elements
- Vandal Resistant - Tamper Resistant Hardware Option (TRH)

SPECIFICATIONS

| | |
|----------------|---|
| Illumination: | Two fully adjustable, ultra bright 3.6 watt, high performance, MR-16 base LED lamp heads offering optimized center-to-center spacing up to 47' |
| Construction: | Housing is fiberglass reinforced polycarbonate construction, Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws |
| Input: | Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided) |
| Mounting: | Die-cast mounting brackets provided for surface wall-mount installation, distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run |
| Finishes: | Gray |
| Options: | TRH - Tamper-Resistant Hardware |
| Certification: | Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes, IP66 rated for Ingress protection, Rated for Class 1, Division 2, Groups A,B,C, & D, UL Listed for Wet Locations |
| Warranty: | Any component that fails due to a manufacturing defect is guaranteed for three years. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information and product registration instructions. (Terms and Conditions apply) |

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____

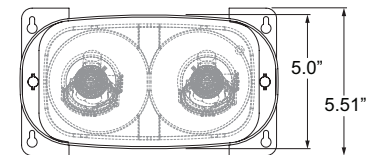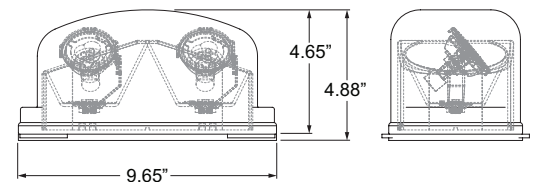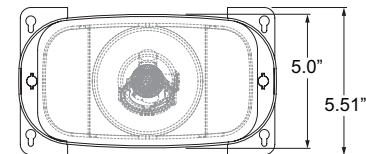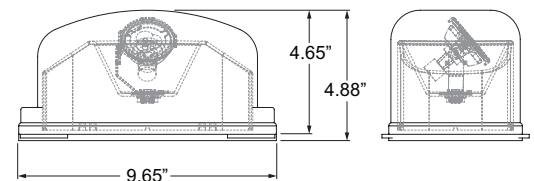

ORDERING INFORMATION Example: HLR-2-TRH

| Series | Style | Options |
|--------|------------|---------------------------------|
| HLR | 1 = Single | TRH = Tamper-Resistant Hardware |
| | 2 = Double | |

CONSTRUCTION

Housing is fiberglass reinforced polycarbonate construction in gray finish. Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

ILLUMINATION

Illumination of the HLR series is achieved with long-life, energy efficient 3.6 watt high performance MR-16 base LED lamp heads with 350 total lumens.

ELECTRICAL

Input

Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

OPTIONS

Tamper-Resistant Hardware (Option: TRH)

T15 Torx head w/center pin tamper-resistant hardware adds an additional layer of protection to the unit, preventing unwanted access to the interior of the unit or removal of the lens.

CONFORMANCE TO CODES & STANDARDS

The HLR Series is UL 924 Listed for Wet Locations and meets or exceeds the following: NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes, IP66 rated for Ingress protection, Rated for Class 1, Division 2, Groups A,B,C, & D.

ON-CENTER SPACING (Multiple units mounted at a typical 7.5 foot height)

| Model | # of LED Lamps | 3' Path, 6' Corridor | 6' Path, 6' Corridor |
|-------|----------------|-------------------------|-------------------------|
| HLR | 2 | 47' | 40' |

Barron assumes no responsibility for local requirements or specific project variables. This is a guideline to be used as a design aid, not as a guarantee of any code compliance.

